

# Profec Ball valve PVC-U 16 mm glue socket 16bar DN15 grey type Safe 600 (0112100)



# TECHNICAL SPECIFICATIONS

Colour grey

Type Safe 600

Material PVC-U

Operation lever

Colour lever red

Handle material PVC-U

Housing construction 3-part

Ball material PVC-U

Material spindle PVC-U

Material housing PVC-U

Material seal hytrel/EPDM

Connection glue socket

Max. temperature 60 °C

Minimum medium temperature 0 °C  
(continuous)

Pressure 16 bar

Size 16 mm

DN

15

## DIMENSIONS

Ct-1

46 mm

Lb

84 mm

R

35 mm

 $\varnothing Df$ 


10 mm

 $\varnothing Di-1$ 

16 mm

 $\varnothing Di-2$ 

16 mm

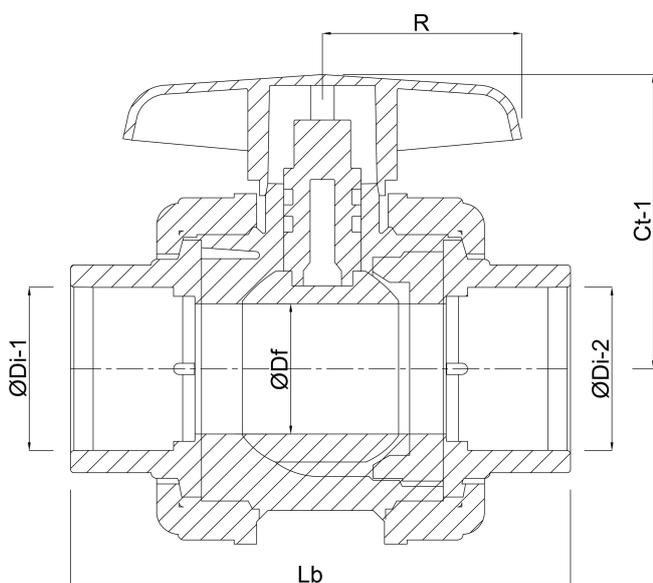

## PRODUCT INFORMATION

With secure ball.

**Last modified date: 17/04/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>