

**Flotide Sand filter**  
**PE/fibreglass-reinforced**  
**polyester 50 mm / 1 1/2"**  
**metric/imperial glue socket**  
**2,5bar grey type S450R**  
**(0891905)**



**FLOTIDE**



**bosta**  
bringing water to life


# TECHNICAL SPECIFICATIONS

Colour	grey
Material	PE/fibreglass-reinforced polyester
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	S450R
Capacity	8 m <sup>3</sup> /h
Size	50 mm / 1 1/2"
Diameter	455 mm
Weight	12 kg
Sand	45 kg
Filter area	0.16 m <sup>2</sup>
Max flow rate	8 m <sup>3</sup> /h
Max. pool vol.	40 m <sup>3</sup>

## DIMENSIONS

A	760 mm
---	--------

B	18 "
B	18 " inch
B	455 mm
C	498 mm
D	435 mm

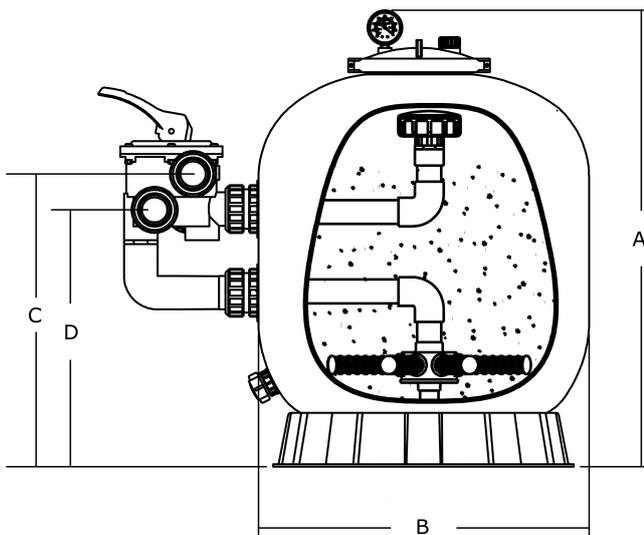

## PRODUCT INFORMATION

PE lined fibreglass reinforced polyester tank with unequalled strength and durability equipped with side-mount 6-way valve.

- Made of fibreglass and polyester (DSM resin). Internal PE lining
- Top diffuser ensures even distribution of water over the top of the sand bed
- The non-corrosive materials are suitable for all-weather performance
- Easy-to-use multi-port valve lets you select any of the valves/filter operations with a simple lever-action
- With easy assembling ring-lock transparent lid (complete with spinners)
- UV resistant surface allows the filter to work under direct sunlight

- Warranty period: 2 years

**Last modified date: 08/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>