

**Foras Multi-stage centrifugal
pump stainless steel 304 1"
female thread 7bar 5,1A
230VAC blue type P 3S-120/6 M
(0920602)**



TECHNICAL SPECIFICATIONS

| | |
|---|-----------------------|
| Colour | blue |
| Material | stainless steel 304 |
| Pump body | stainless steel 304 |
| Material impeller 1 | stainless steel 304 |
| Material seal | ceramic/graphite |
| Connection | female thread |
| Max. temperature | 110 °C |
| Minimum medium temperature (continuous) | -15 °C |
| Max flow rate | 4.8 m ³ /h |
| Press | 1 " |
| Suction | 1 " |
| BEP Capacity | 3.2 |
| Efficiency | 39 % |
| Type | P 3S-120/6 M |
| Output Power | 1,2 HP |
| Size | 1" |

| | |
|-----------|---------|
| Seal | type L |
| Voltage | 230VAC |
| Weight | 12.5 kg |
| Power | 0.9 kW |
| Impellers | 6 |
| MWC | 66,6 |
| Ampere | 5,1 A |
| BEP Head | 36 |



DIMENSIONS

| | |
|------|----------|
| Cb-1 | 128 mm |
| Cl-1 | 175 mm |
| G-1 | 140 mm |
| H-1 | 203 mm |
| H-2 | 192 mm |
| L | 428 mm |
| Lb | 190,8 mm |
| Lb-2 | 104,7 mm |
| W-1 | 164 mm |

W-2 178 mm

ØDi-1 1 "

ØDi-2 1 "

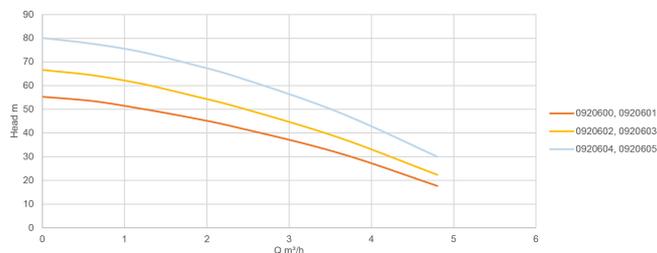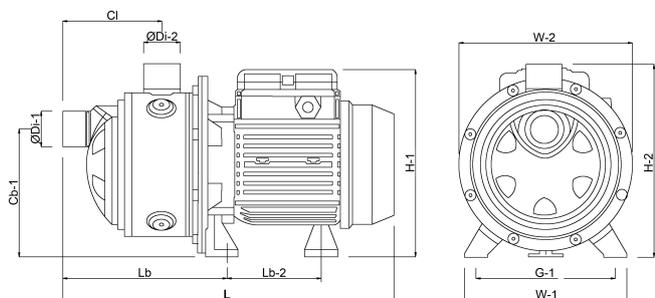

PRODUCT INFORMATION

Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids in the domestic, agricultural and industrial sectors; pressurising systems; irrigation; drinking and glycol water; water treatment; food industry; heating and air conditioning; washing system.

Maximum liquid temperature: from -15 up to 110 °C

Ambient temperature: max 40 °C.

Insulation class F; protection IP 44.

Supplied without cable.

Last modified date: 08/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>