

**Submersible pump plastic 1" x  
1 1/4" male thread 2,4A  
230VAC blue IPC 550 type IPC  
Flat suction (7031123)**



# TECHNICAL SPECIFICATIONS

Colour blue

Type IPC

Material plastic

Output Power 0,73 HP

Pump body plastic

Material impeller 1 noryl

Model IPC 550

Connection male thread

Type Flat suction

Float not included

Voltage 230VAC

Max. temperature 35 °C

Power 0.55 kW

MWC 6

Ampere 2,4 A

Max flow rate 6 m<sup>3</sup>/h

Maximum ambient temperature 40 °C

Size 1" x 1 1/4"

BEP Capacity 3.6


BEP Head 3.7

PORlh 4.6

PORhh 2.9

PORlq 2.52

PORhq 4.32

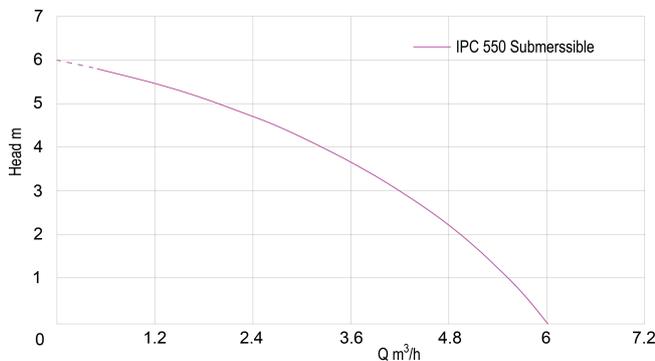

## PRODUCT INFORMATION

For clean water only. Max. immersion depth: 7 metres. Built-in non return valve with 3 adaptors for different connections. Comes with a cooling jacket so they can be partially submerged. Pumping can start when the water level is above 5mm. After removing the suction filter, water can be pumped until 1mm. Installation: vertical, fixed or portable. Operation: selection (1) Automatic or (2) Manual operating mode. 10 mtr cable and DIN plug

**Last modified date: 10/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>