

**Submersible borehole pump 1
1/2" female thread 11,9A
230VAC with 20m cable type
SDM 3/23 with capacitor - oil
cooling (7031117)**



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
Material impeller 1	noryl
Model	with 20m cable
Connection	female thread
Type	with capacitor - oil cooling
Voltage	230VAC
Max. temperature	35 °C
Outer ø	90 mm
Max flow rate	6 m ³ /h
Press	1,5 "
Maximum ambient temperature 35 °C	
BEP Capacity	4.8
IP value	IP68
Type	SDM 3/23
Output Power	2,4 HP
Max. head	130 m
Size	1 1/2"

Weight 23 kg

Power 1.8 kW

Impellers 23

Height 1670 mm

Ampere 11,9 A

BEP Head 62.5

PORlh 101

PORhh 24

PORlq 3.36



PORhq 5.76

DIMENSIONS

Db 90 mm

H-1 1670 mm

ØDi-1 1 1/2 "

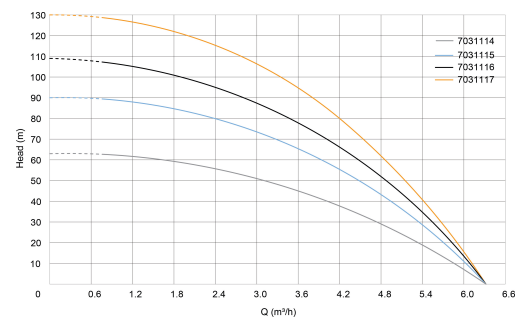

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 08/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>