

**DAB Submersible pump
reinforced plastic 1 1/4" male
thread 3,5A 230VAC green
type Nova UP 600 M-AE
(7030948)**



TECHNICAL SPECIFICATIONS

Colour	green
Material	reinforced plastic
Pump body	technopolymer
Material impeller 1	technopolymer
Connection	male thread
Float	integrated
Voltage	230VAC
Max. temperature	35 °C
Minimum medium temperature (continuous)	0 °C
Press	1 1/4 "
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Type	Nova UP 600 M-AE
Output Power	0,69 HP
Max. head	9,8 m
Size	1 1/4"

Power	0.52 kW
-------	---------

Ampere	3,5 A
--------	-------

Max flow rate	13.5 m ³ /h
---------------	------------------------

BEP Capacity	10.8
--------------	------

BEP Head	5.74
----------	------

PORlh	7.17
-------	------

PORhh	4.47
-------	------

PORlq	7.56
-------	------

PORhq	12.96
-------	-------

DIMENSIONS



Db	160 mm
----	--------

H-1	111.6 mm
-----	----------

H-2	324 mm
-----	--------

W-1	206 mm
-----	--------

ØDi-1	1 "
-------	-----

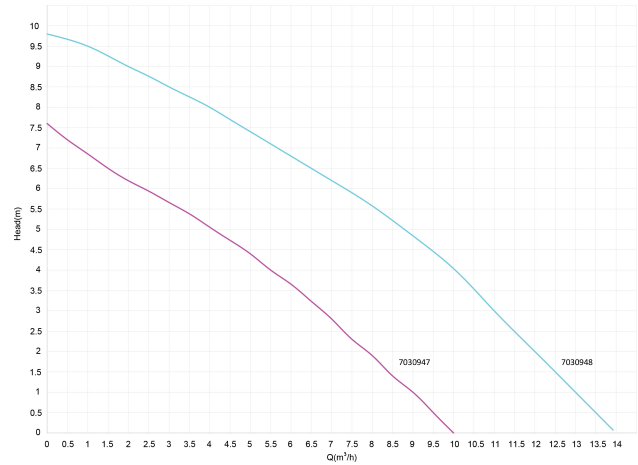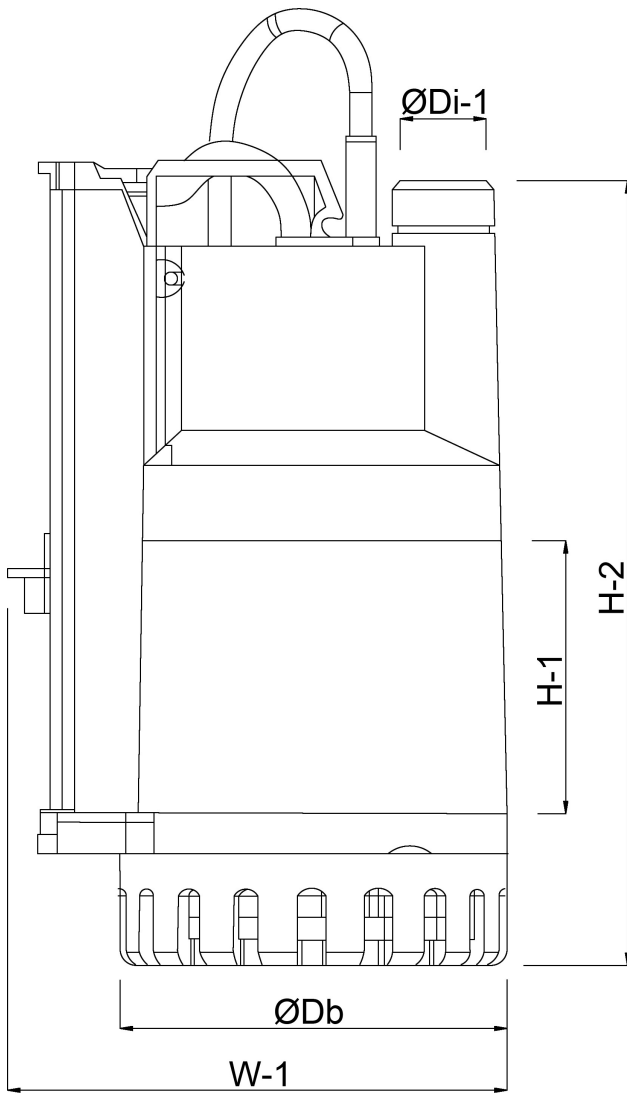

PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

Last modified date: 26/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>