DAB Submersible pump stainless steel 304 2" female thread 230VAC stainless steel type Feka VS 1500 with float switch (7050625)



DAB
MAKING WATER EASY

bosta
bringing water to life


TECHNICAL SPECIFICATIONS


Colour	stainless steel
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	stainless steel 304
Connection	female thread
Max. temperature	50 °C
Minimum medium temperature (continuous)	0 °C
Press	2 "
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Type	Feka VS 1500
Output Power	2 HP
Max. head	17 m
Size	2"
Float	included
Voltage	230VAC

Power	1.5 kW
Max flow rate	36 m^3/h

DIMENSIONS

Cb-1	98 mm
Db	170 mm
H	172 mm
L	492 mm
W-1	203 mm
ØDi-1	2 "

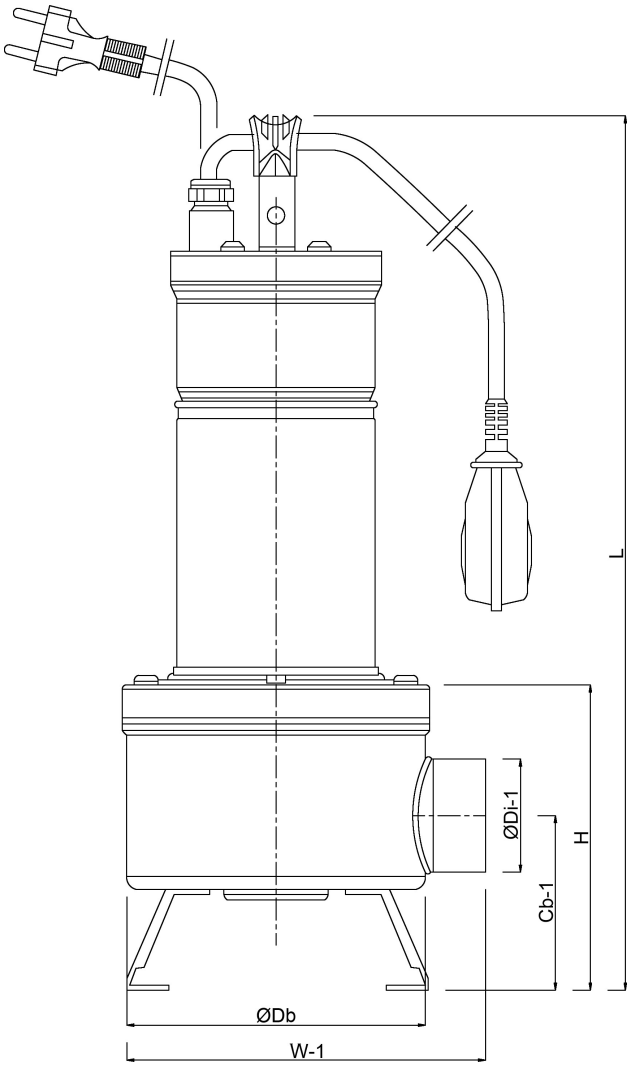

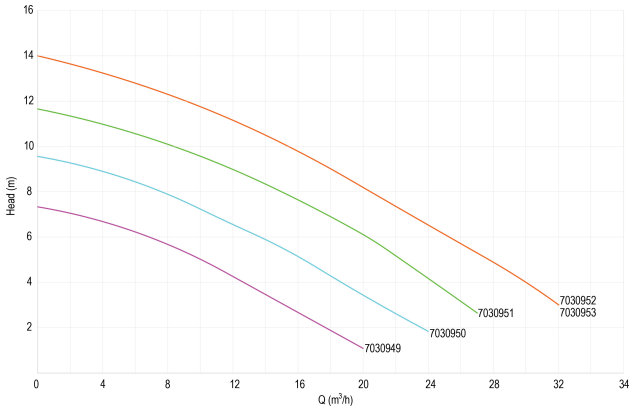

PRODUCT INFORMATION

Power cable: 10 metre H07RN-F, with plug for the single-phase version.
Installation: fixed or portable, vertical position.
Maximum immersion depth: 7 metre
Suitable for residential waste water as sewage containing solid matter with size up to 50 mm.

Last modified date: 20/11/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life