

**PSH Pool pump polypropylene
2" female thread 3,3A 400VAC
black type ND.2 28T (7032227)**



 P S H

TECHNICAL SPECIFICATIONS

| | |
|---------------------|----------------------|
| Colour | black |
| Shaft | stainless steel 316 |
| Pump body | PP/GF30 |
| Material impeller 1 | noryl |
| Material cover | polycarbonate |
| Material seal | carbon/ceramic |
| Connection | female thread |
| Max. temperature | 40 °C |
| Width | 220 mm |
| Height | 288 mm |
| Frequency | 50 Hz |
| IP value | IP55 |
| Motor RPM | 2900 |
| Type | ND.2 28T |
| Capacity | 35 m ³ /h |
| Output Power | 2 HP |
| Size | 2" |

Length 581 mm



Voltage 400VAC

Weight 19 kg

Power 1.5 kW

MWC 18

Ampere 3,3 A

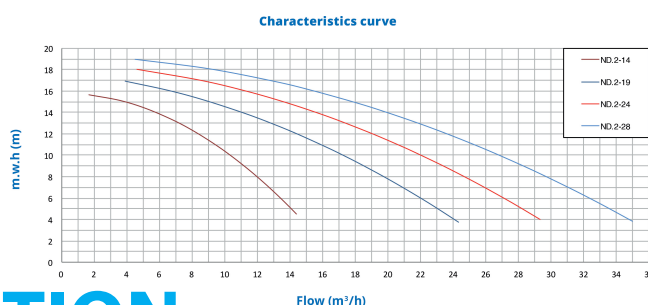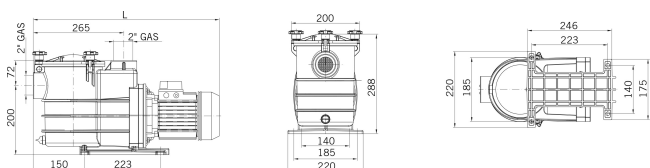

PRODUCT INFORMATION

High corrosion-resistant materials and quality manufacture have combined to produce a highly reliable, self priming pool pump for your swimming pool.

Features:

- Connection: female thread
- Self-priming up to 4mwh
- Suitable for operation with salt chlorinators and sea water up to 3,5% (35gr/l)
- High efficiency three phase motor class IE3 according to standard IEC 60034-30-1
- Thermal protection incorporated in single-phase version
- Insulation Class: F
- Protection: IP55
- Motor: 50Hz/2900 rpm with option of 60Hz
- Max water temperature: 40°C
- Interchangeable with PSH ND1 pump

Last modified date: 10/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>