Waterco Commercial sand filter fibreglass 3"/90mm flange 2,5bar grey type SMD1200 (7029501)








TECHNICAL SPECIFICATIONS

Colour	grey
Material	fibreglass
Connection	flange
Pressure	2,5 bar
Max. temp.	50 °C
Туре	SMD1200
Capacity	34 m³/h
Size	3"/90mm
Sand	1715 kg
Filter area	1.13 m ²
Max flow rate	45 m³/h
Max. pool vol.	170 m ³

DIMENSIONS

Α	977 mm
В	1229 mm
С	1935 mm



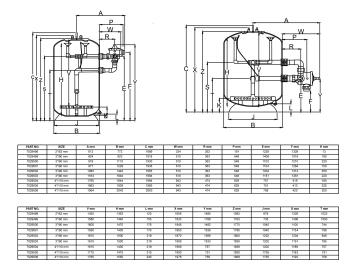

PRODUCT INFORMATION

Waterco commercial sand filter SMD is a micron fibreglass filter which embody the latest in fibreglass winding technology. The digitally controlled filament winding machine faultlessly winds continuous strands of high quality fibreglass filament under controlled tension to create a seamless one-piece vessel with refined consistency and superior quality. There are no welds or seams or special tank linings which can corrode or electrolyse. Its "Fish Tail" lateral configuration eliminates any "dead legs" by improving water flow distribution through the filter bed. SMD model is available in 2.5 bar, 4 bar, 6 bar, 8 bar and 10 bar pressure ratings.

Features:

- 1m bed depth
- Ultra smooth bobbin finish
- Large double yoke lid with lifting eye
- Large clear sight glass
- Large stable base
- Quick connect unions
- Fish Tail lateral
- Optional nozzle plate
- 10 years tank warranty



Last modified date: 06/10/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

