


**Flat hose NBR/PVC 51 mm  
16bar black 100m type Oneflex  
(7027614)**

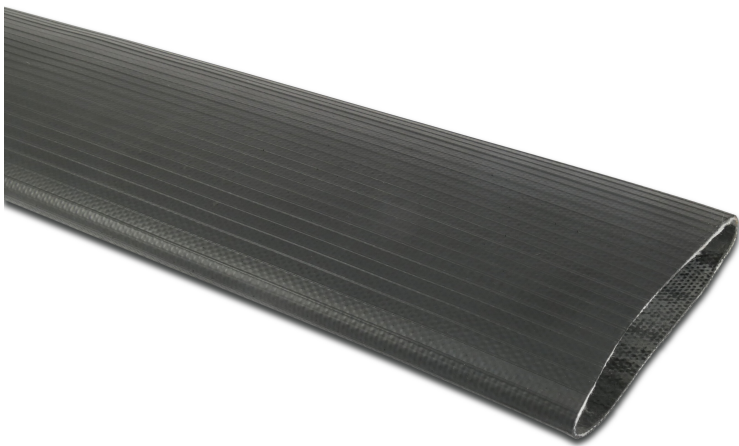

# TECHNICAL SPECIFICATIONS

|                   |               |
|-------------------|---------------|
| Colour            | black         |
| Type              | Oneflex       |
| Material          | NBR/PVC       |
| Temperature range | -20°C - 100°C |
| Size              | 51 mm         |
| Length            | 100 m         |
| Inner ø           | 51 mm         |
| Outer ø           | 55,2 mm       |
| Weight            | 400 g/m       |
| Bursting pressure | 48 bar        |
| Pressure          | 16 bar        |
| Tensile strength  | 4000 kg       |
| Wall thickness    | 2,1 mm        |

## PRODUCT INFORMATION

NBR Flat hose in 51 mm up to 204mm, with inlay, used in industrial and agricultural irrigation, with high wear and tear resistance. Known as feeder hose to irrigation reels. This hose has a tensile strength of 4,000 up to 20,000 kg and a bursting pressure of 30 bar up to

50 bar. It is used for working temperatures ranging from minus 20 up to 80°C.

**Last modified date: 10/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>