

Pentair Sand filter fibreglass reinforced polyester 1 1/2" female thread 3,5bar blue type F-24S8-NEOCPPRO (7025516)



TECHNICAL SPECIFICATIONS

Colour	blue
Material	fibreglass reinforced polyester
Connection	female thread
Pressure	3,5 bar
Max. temp.	50 °C
Type	F-24S8-NEOCPPRO
Size	1 1/2"
Diameter	610 mm
Weight	20.4 kg
Sand	150 kg
Filter area	0.29 m ²
Max flow rate	14 m ³ /h
Max. pool vol.	70 m ³

DIMENSIONS


A	915 mm
B	24 " inch

B 400 mm

C 949 mm

D 438 mm

E 211 mm

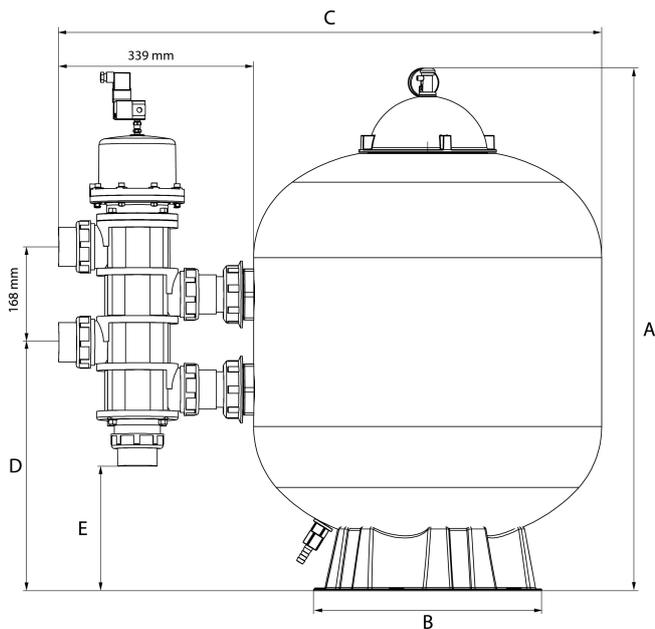

PRODUCT INFORMATION

One-piece, fibreglass-reinforced tank with UV-resistant coating and Pro Valve. The Pentair Pro Valve enables external control systems such as IntelliPool™ to perform automated filter backwash. Warranty period: Tank 10 years

Last modified date: 09/03/2026

Bosta UK Ltd.
Reflection House
Olding Road

Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>