

**Profec Ball valve PVC-U 75 mm
glue socket 10bar 24-
240VAC/VDC grey type Safe
600 with actuator J4C S55
(7018924)**



TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 600 with actuator J4C S55
Material	PVC-U
Operation	actuator
Housing construction	3-part
Switching time	15 sec.
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Voltage	24-240VAC/VDC
Max. temperature	60 °C
Maximum ambient temperature	-10 - +60 °C
Pressure	10 bar
Size	75 mm
Factory pre-adjustment	 bar

DIMENSIONS


Ct-1 279 mm

Lb 214 mm

ØDf 65 mm

ØDi-1 75 mm

ØDi-2 75 mm

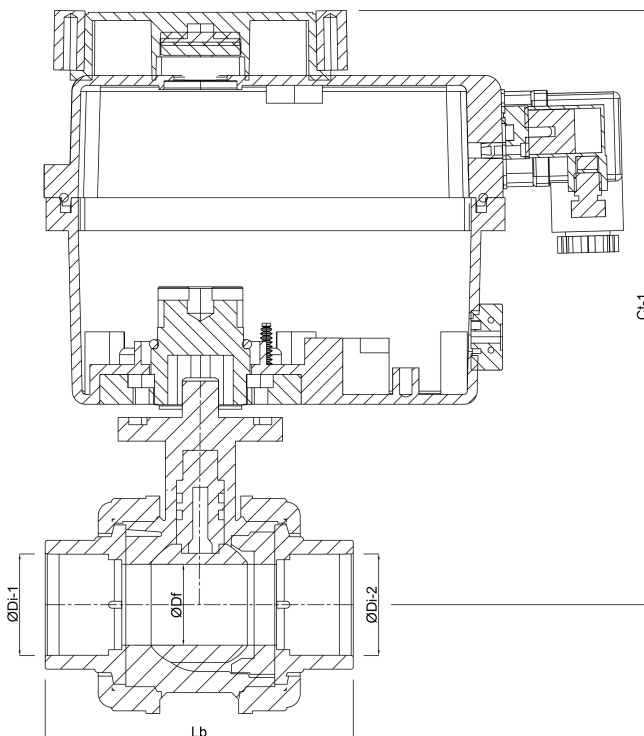

PRODUCT INFORMATION

Connection according to DIN 43650.

Last modified date: 10/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>