

# DAB Submersible borehole pump stainless steel 304 1" female thread 3,3A 230VAC with 15m cable and control box booster type Micra 50M oil cooling (7030892)



# TECHNICAL SPECIFICATIONS

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 noryl GFN2

Connection female thread

Type oil cooling

Voltage 230VAC

Max. temperature 35 °C

Outer ø 74 mm

Minimum medium temperature 0 °C  
(continuous)

Max flow rate 2.7 m<sup>3</sup>/h

Press 1 "

BEP Capacity 1.8

IP value IP68

Type Micra 50M

Output Power 0,5 HP

Model with 15m cable and control box booster

Max. head	45 m
-----------	------

Size	1"
------	----

Weight	9 kg
--------	------

Power	0.37 kW
-------	---------

Impellers	15
-----------	----

Ampere	3,3 A
--------	-------

BEP Head	26.9
----------	------

PORlh	34.3
-------	------

PORhh	18.8
-------	------

PORlq	1.3
-------	-----

PORhq	2.2
-------	-----



## DIMENSIONS

Db	74 mm
----	-------

H-1	930 mm
-----	--------

ØDi-1	1 "
-------	-----

ØDi-1

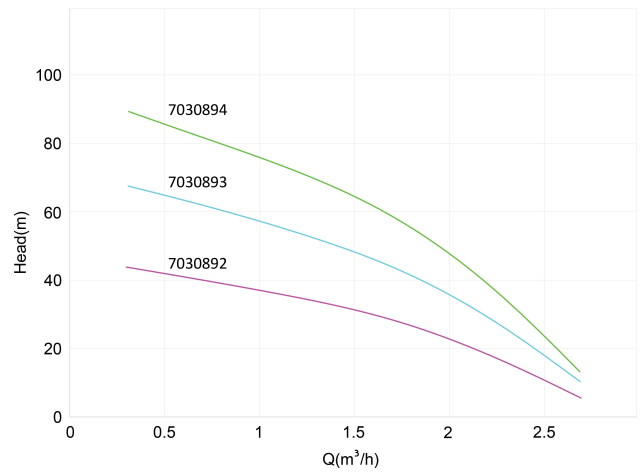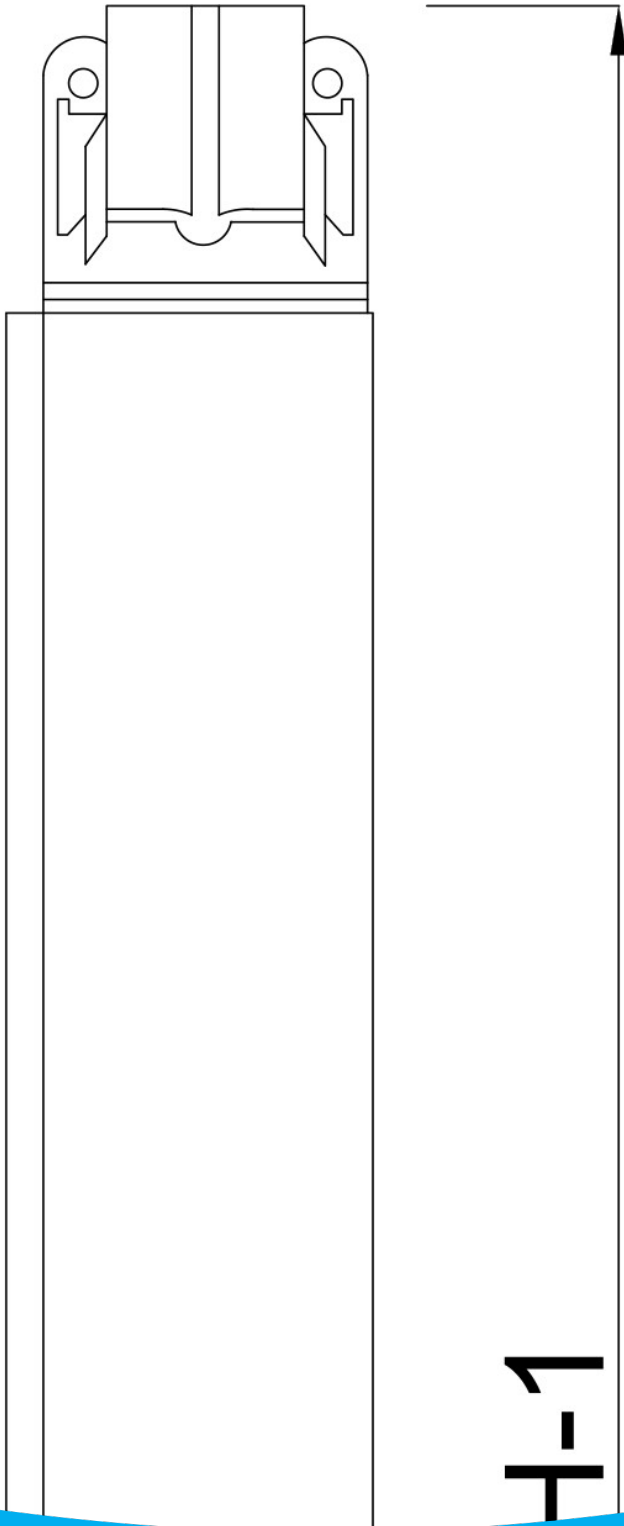

# PRODUCT INFORMATION

Includes assembled 15m cable and control box booster.

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.

Maximum permitted amount of sand: 40 g/m<sup>3</sup>.

Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

**Last modified date: 26/05/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>