

**PSH Commercial pool pump
PP/GF30 75 mm glue socket
5,4/3,1A 230/400VAC black
type Maxi-20T IE3 2HP
(7039027)**





 P S H

TECHNICAL SPECIFICATIONS

Colour	black
Shaft	stainless steel 316
Pump body	PP/GF30
Material impeller 1	PPO-GF30
Material cover	polycarbonate
Material seal	carbon/ceramic
Connection	glue socket
Max. temperature	40 °C
Width	232 mm
Height	325 mm
Frequency	50 Hz
IP value	IP55
Motor RPM	2900
Type	Maxi-20T IE3
Capacity	4,5 - 44,7 m ³ /h
Output Power	2 HP
Max. head	16 m

Size	75 mm
Length	719 mm
Voltage	230/400VAC
Weight	19.6 kg
Power	1.5 kW
Ampere	5,4/3,1 A

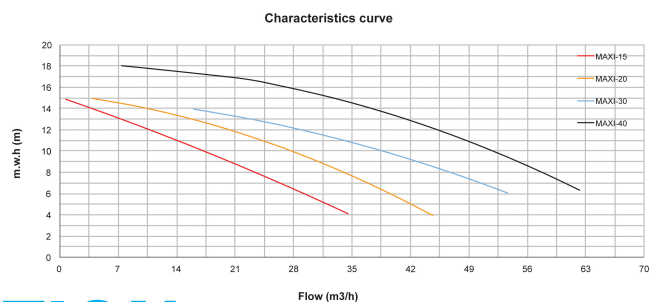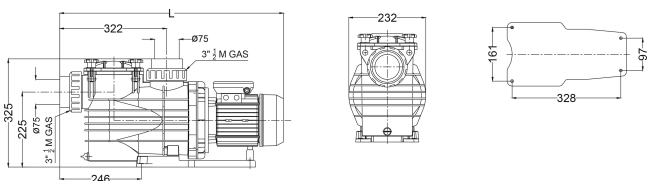


PRODUCT INFORMATION

The Maxi pumps are ideal pumps for medium sized commercial pools.

Features:

- Self-priming up to 2mwh
- Suitable for operation with salt chlorinators and sea water
- High efficiency three phase motor class IE3 according to regulation (EU) 2019/1781
- Thermal protector incorporated in single-phase version
- Insulation Class: F
- Protection: IP55 rating
- Motor: 50Hz/2900 rpm.
- Motor painting using cataphoresis
- Max temperature: 40°C

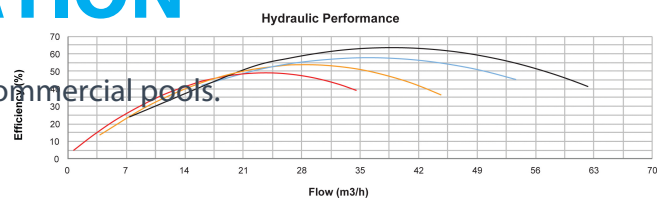

Last modified date: 08/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>