

**Foras Jet pump cast iron 1 1/2"  
x 1 1/4" female thread 8bar  
8,2A 230VAC blue self priming  
type JAM 150 (7034803)**



# TECHNICAL SPECIFICATIONS

Colour	blue
Material	cast iron
Pump body	cast iron
Material impeller 1	noryl
Model	self priming
Connection	female thread
Seal	type B
Max. temperature	50 °C
Minimum medium temperature (continuous)	0 °C
Max flow rate	7.2 m <sup>3</sup> /h
Press	1 1/4 "
Suction	1 1/2 "
Type	JAM 150
Max. head	54.8 m
Size	1 1/2" x 1 1/4"
Voltage	230VAC

Power 1.5 kW

Ampere 8.5 A

Maximum ambient temperature 40 °C

BEP Capacity 6

BEP Head 29

PORlh 35

PORhh 51

PORlq 4.2

PORhq 7.2

Minimum ambient temperature 0 °C

## DIMENSIONS

Cb-1 175 mm

Cb-1 175 mm

Cb-2 231.5 mm

Cl-1 167 mm

Cr-1 167 mm

Ct-1 56.5 mm

G-1 165 mm

H 231.5 mm

H-1 231.5 mm

L 506 mm

L 506 mm

LM 236.4 mm

Mr 269.6 mm

MW 165 mm



O 9 mm

W 203 mm

W-1 203 mm

ØDi-1 1 1/2 "

ØDi-2 1 1/4 "

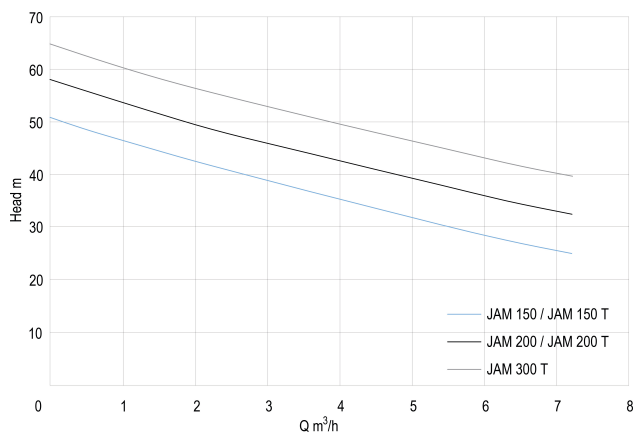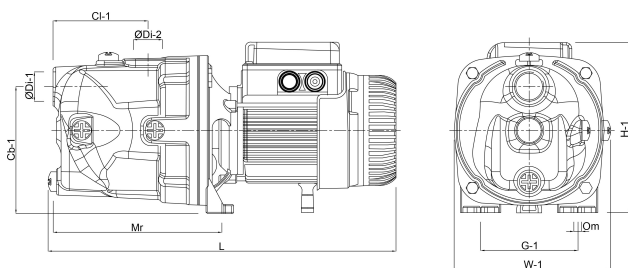

# PRODUCT INFORMATION

Self-priming centrifugal pump for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks, for transferring liquids and emptying tanks; also used for gardening. MOTOR: 2-pole electric induction motor for continuous operations; stator made with low-loss laminated electric sheet steel; insulation Class F; IP 44 protection level; thermal protection for singlephase models; the user is responsible for supplying protection for the three-phase models.

Features:

- Cast iron pump casing with threaded inlet and outlet
- Cast iron motorbracket; impeller in Noryl or in brass
- Ceramic - graphite mechanical seal
- Motor shaft in AISI 416 steel
- World leading brand ball bearings
- Liquid temperature range 0 - 50 °C
- Max. operating pressure 8 bar.

**Last modified date: 10/07/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>