

**Profec Non return valve ductile
iron (GGG40) epoxy coating
DN100 DIN flange 10bar
DN100 blue PN10/16 (0401931)**



TECHNICAL SPECIFICATIONS

| | |
|-------------------|----------------------|
| Colour | blue |
| Material | ductile iron (GGG40) |
| Surface treatment | epoxy coating |
| Material cover | cast iron GG 40 |
| Material housing | ductile iron (GGG40) |
| Material seal | NBR |
| Connection | DIN flange |
| Gasket | NBR |
| DIN Standard | DIN 2501 |
| Temperature range | -20°C - 100°C |
| RAL number | RAL5017 |
| Opening pressure | 1 bar |
| Pressure | 10 bar |
| Ball material | carbon/NBR |
| Size | DN100 |
| Length | 300 mm |
| DN | 100 |

Flange PN10/16

Outer \varnothing 215 mm

Holes 8

DIMENSIONS


Construction length din 3202 f6

Ct-1 180 mm

Install. length din 3202 f6

L 300 mm

PCD 180 mm

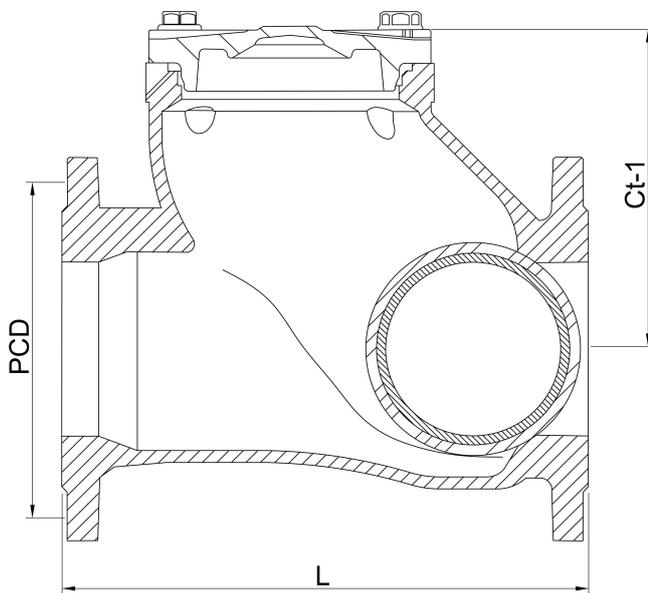

Last modified date: 07/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>