

**DAB Submersible pump  
reinforced plastic 1 1/4" male  
thread 1,5A 230VAC green  
type Nova UP 300 M-AE  
(7030947)**



# TECHNICAL SPECIFICATIONS

Colour	green
Material	reinforced plastic
Pump body	technopolymer
Material impeller 1	technopolymer
Connection	male thread
Float	integrated
Voltage	230VAC
Max. temperature	35 °C
Minimum medium temperature (continuous)	0 °C
Press	1 1/4 "
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Type	Nova UP 300 M-AE
Output Power	0,28 HP
Max. head	7,6 m
Size	1 1/4"

Power	0.21 kW
-------	---------

Ampere	1,5 A
--------	-------

Max flow rate	9 m <sup>3</sup> /h
---------------	---------------------

BEP Capacity	10.8
--------------	------

BEP Head	5.74
----------	------

PORlh	7.17
-------	------

PORhh	4.47
-------	------

PORlq	7.56
-------	------

PORhq	12.96
-------	-------

## DIMENSIONS



Db	160 mm
----	--------

H-1	75.9 mm
-----	---------

H-2	296.2 mm
-----	----------

W-1	206 mm
-----	--------

ØDi-1	1 "
-------	-----

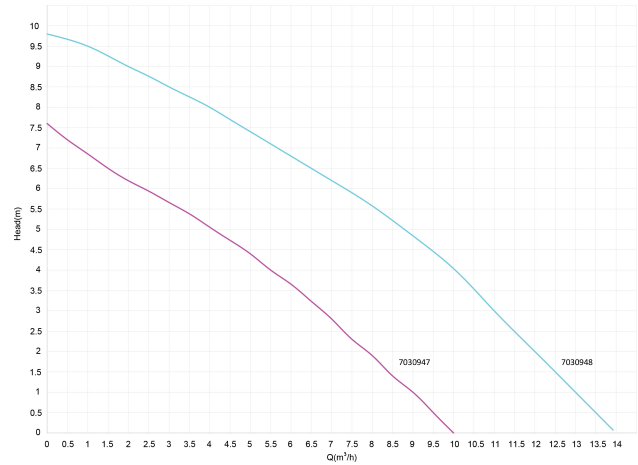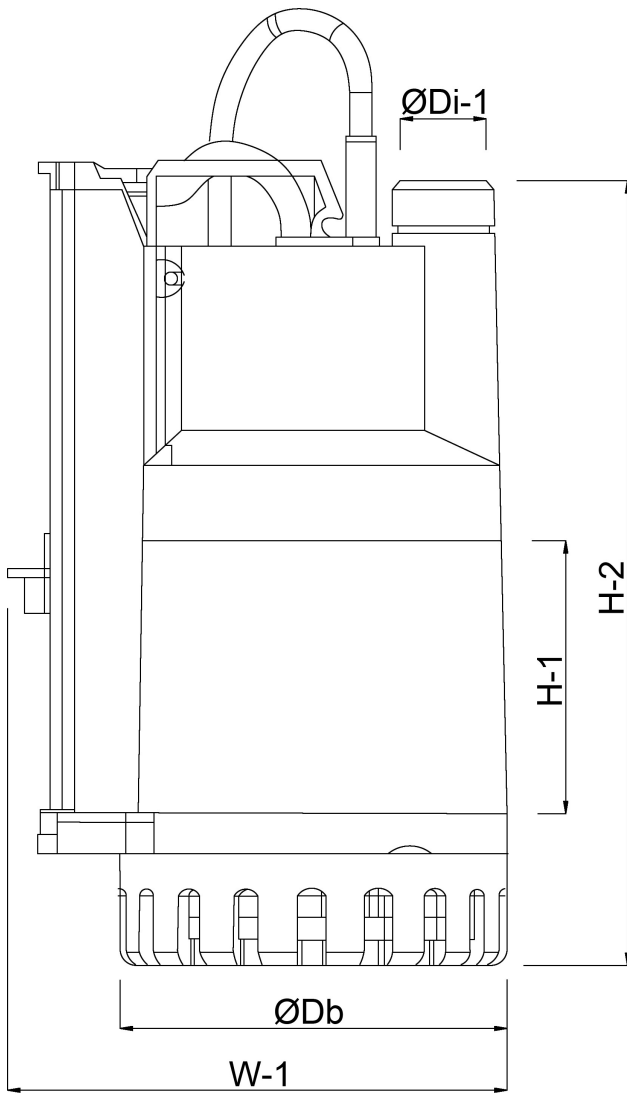

## PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

**Last modified date: 26/05/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>