Profec Ball valve single union PVC-U 20 mm glue socket 16bar DN15 grey type Safe 525 (0112140)



PROFEC

bosta
bringing water to life


TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 525
Material	PVC-U
Operation	lever
Colour lever	red
Handle material	PVC-U
Housing construction	2-part
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Max. temperature	60 °C
Minimum medium temperature (continuous)	0 °C
Pressure	16 bar
Size	20 mm
WebshopURL	https://www.bosta.com/en-gb/profec-ball-valve-single-union-pvc-u-20-mm-glue-socket-16bar-dn15-grey-type-safe-525-0112140

DN	15

DIMENSIONS

Ct-1	46 mm
Lb	75 mm
R	35 mm
ØDf	15 mm
ØDi-1	20 mm
ØDi-2	20 mm

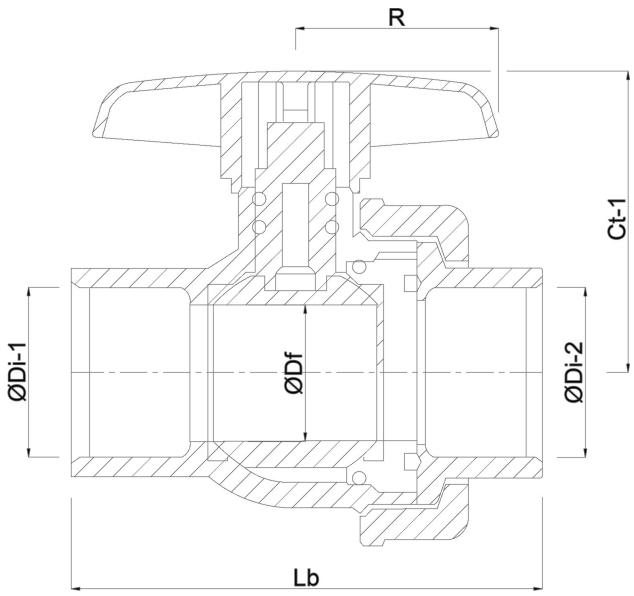

PRODUCT INFORMATION

With secure ball.

Last modified date: 31/10/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com