

**DAB Submersible pump
reinforced plastic 1" male
thread 3,5A 230VAC green
type Nova UP 600 M-A with
float switch (7030945)**



TECHNICAL SPECIFICATIONS

Colour	green
--------	-------

Material	reinforced plastic
----------	--------------------

Pump body	technopolymer
-----------	---------------

Material impeller 1	technopolymer
---------------------	---------------

Connection	male thread
------------	-------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Minimum medium temperature 0 °C
(continuous)

Press	1 "
-------	-----

Maximum ambient temperature 40 °C

Minimum ambient temperature	0 °C
-----------------------------	------

Type	Nova UP 600 M-A
------	-----------------

Output Power	0,7 HP
--------------	--------

Size	1"
------	----



Float	included
-------	----------

Power	0.52 kW
-------	---------

MWC	9,8
Ampere	3,5 A
Max flow rate	13.5 m ³ /h
BEP Capacity	10.8
BEP Head	5.74
PORlh	7.17
PORhh	4.47
PORlq	7.56
PORhq	12.96

DIMENSIONS

ØDi-1	1 "
H-1	111.6 mm
H-2	332 mm
Db	160 mm

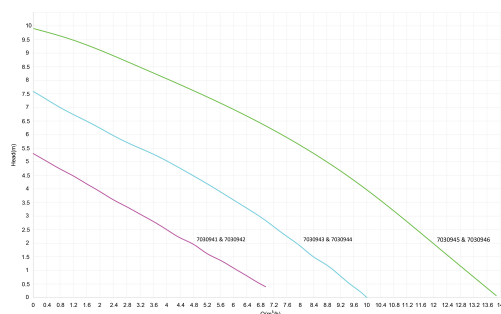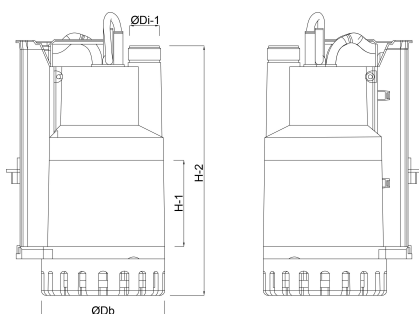

PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

Last modified date: 19/02/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>