

**DAB Jet pump stainless steel
304 1" female thread 8bar 6,6A
230VAC green self-priming
with press control type
JETINOX 132 Control D
(7030932)**



TECHNICAL SPECIFICATIONS

Colour green

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 technopolymer A

Model self-priming with press control

Connection female thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Suction 1 "

Type JETINOX 132 Control D

Max. head 48,3 m

Size 1"

Power 0.75 kW

Ampere	6,6 A
--------	-------

Max flow rate	4.8 m ³ /h
---------------	-----------------------

BEP Capacity	3.5
--------------	-----

BEP Head	33
----------	----

PORlh	37.5
-------	------

PORhh	29.8
-------	------

PORlq	2.5
-------	-----

PORhq	4.2
-------	-----

DIMENSIONS

Cb-1	98.5 mm
------	---------

Cb-1	144 mm
------	--------

Cl-1	122 mm
------	--------

Cr-1	87 mm
------	-------

Ct-1	98.5 mm
------	---------

G-1	111 mm
-----	--------

H	197 mm
---	--------

H	197 mm
---	--------

L	424 mm
---	--------

L 440 mm

LM 424 mm



Mr 207 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

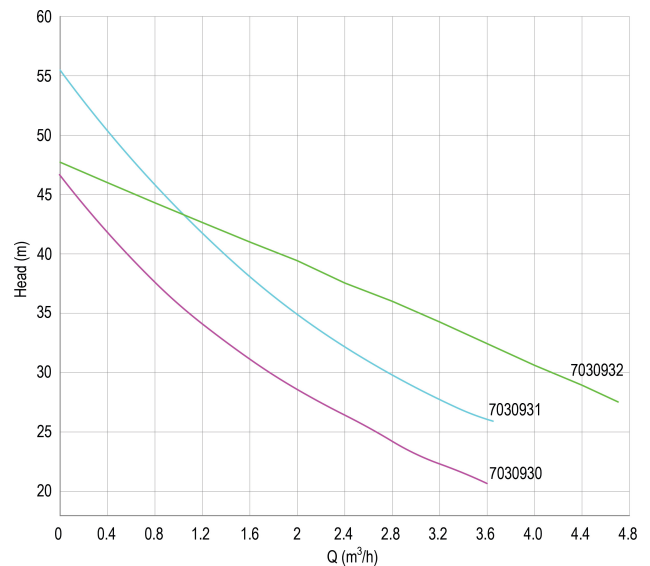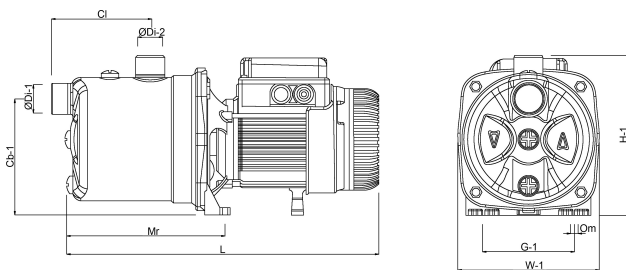

PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Last modified date: 26/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>