

# Pentair Pool filter set PE 50 mm glue socket 2bar 4,2A 230VAC black type FS-19A6-FF15R (7015888)



 PENTAIR

# TECHNICAL SPECIFICATIONS

Colour black

Material PE

Connection glue socket

Voltage 230VAC

Frequency 50 Hz

Pressure 2 bar

IP value IP44

Max. temp. 35 °C

Type FS-19A6-FF15R

Size 50 mm

Diameter 475 mm

Weight 18 kg

Sand 65 kg

Ampere 4,2 A

Max flow rate 9 m<sup>3</sup>/h

Pump FreeFlo FF15R



Max. pool vol. 45 m<sup>3</sup>

# DIMENSIONS

A 760 mm

B 19" inch

B 900 mm

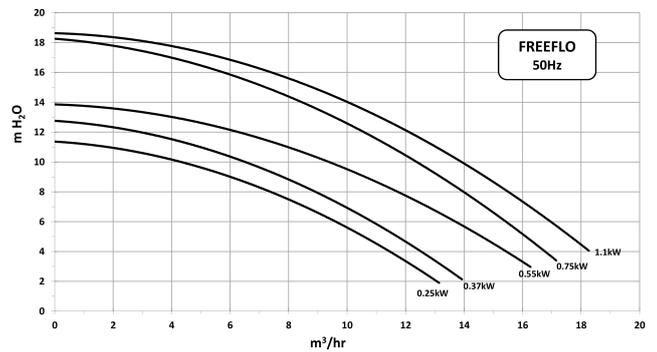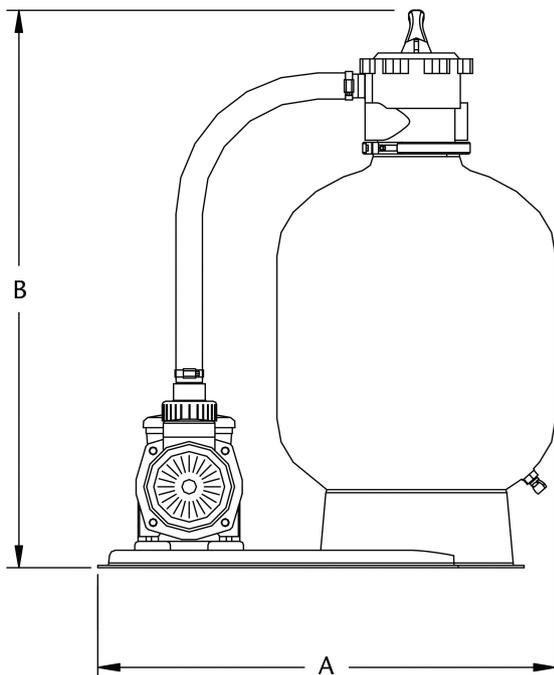

# PRODUCT INFORMATION

Strong and durable thermoplastic tank with 6-way valve and FreeFlo centrifugal pump. The pump has a large pre-filter for a longer service interval. Complete set mounted on a solid base.

**Last modified date: 09/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>