



# TECHNICAL SPECIFICATIONS

Colour green

Material cast iron

Pump body cast iron

Material impeller 1 technopolymer A

Model self-priming with press control

Connection female thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C  
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Suction 1 "

Type JET 102 Control D

Size 1"

Power 0.75 kW

MWC 53,8

Ampere	5,1 A
--------	-------

Max flow rate	3.6 m <sup>3</sup> /h
---------------	-----------------------

BEP Capacity	2.4
--------------	-----

BEP Head	31.8
----------	------

PORlh	36.5
-------	------

PORhh	29
-------	----

PORlq	1.7
-------	-----

PORhq	2.9
-------	-----

## DIMENSIONS

Cb-1	144 mm
------	--------

Cl-1	108 mm
------	--------

G-1	111 mm
-----	--------

H	203 mm
---	--------

H	203 mm
---	--------

L	414 mm
---	--------

L	430 mm
---	--------

Mr	197 mm
----	--------



O	9 mm
---	------

W 178 mm

W-1 178 mm

ØDi-1 1 "

ØDi-2 1 "

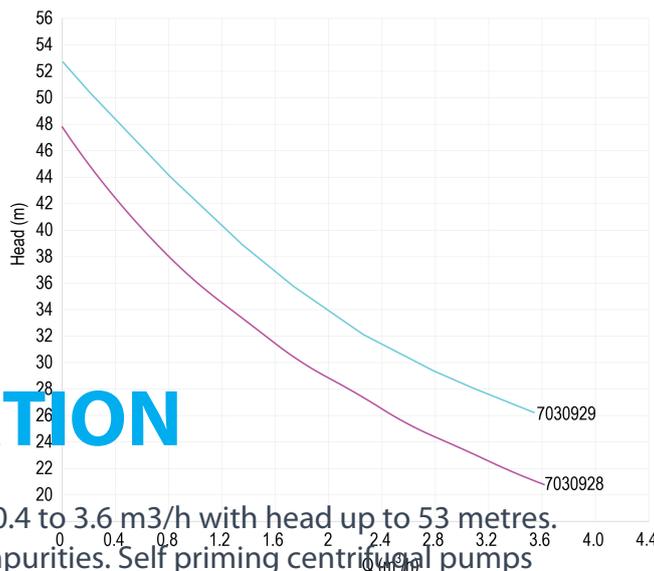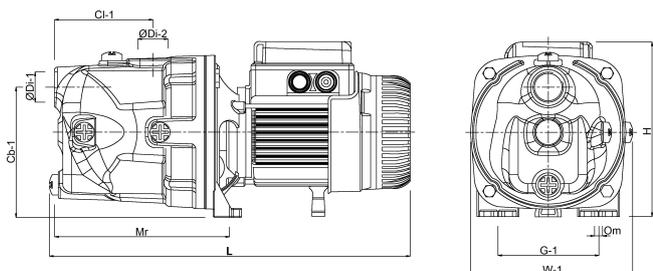

## PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 3.6 m<sup>3</sup>/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Last modified date: 14/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>