

**DAB Submersible borehole
pump stainless steel 304 1 1/4"
female thread 6,3A 230VAC
with 15m cable and control box
booster type S4 KIT 4/9 oil
cooling (7030916)**



TECHNICAL SPECIFICATIONS

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 technopolymer

Connection female thread

Type oil cooling

Voltage 230VAC

Max. temperature 40 °C

Outer ø 99 mm

Minimum medium temperature 0 °C
(continuous)

Maximum ambient temperature -10 °C

Minimum ambient temperature 40 °C

IP value IP68, class F

Type S4 KIT 4/9

Output Power 1 HP

Model with 15m cable and control box booster

Max. head 62 m

Size 1 1/4"

Weight 12.3 kg

Power 0.75 kW

Impellers 9

Ampere 6,3 A

Max flow rate 4.2 m³/h

Press 1 "

BEP Capacity 3.85

BEP Head 39.8

PORlh 49.7

PORhh 30.6

PORlq 2.7

PORhq 4.6

Efficiency 61,6 %

Packaging dimensions L/W/H 120 x 120 x 874 mm

DIMENSIONS



Db 99 mm

H-1 774 mm

ØDi-1

1 1/4"

ØDi-1

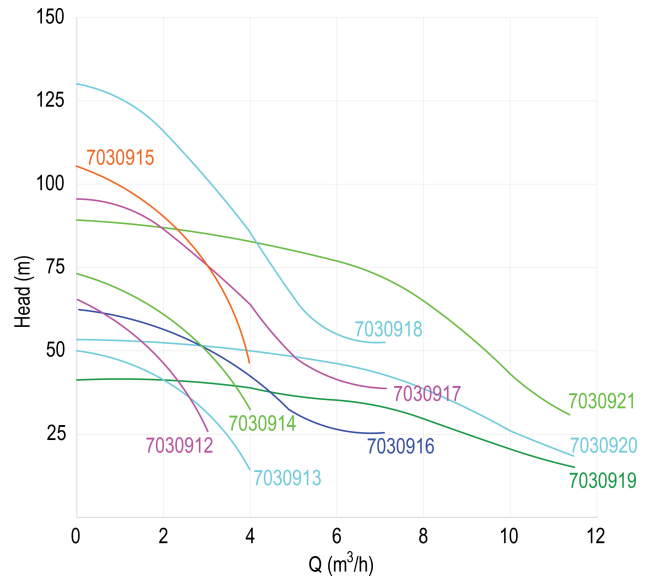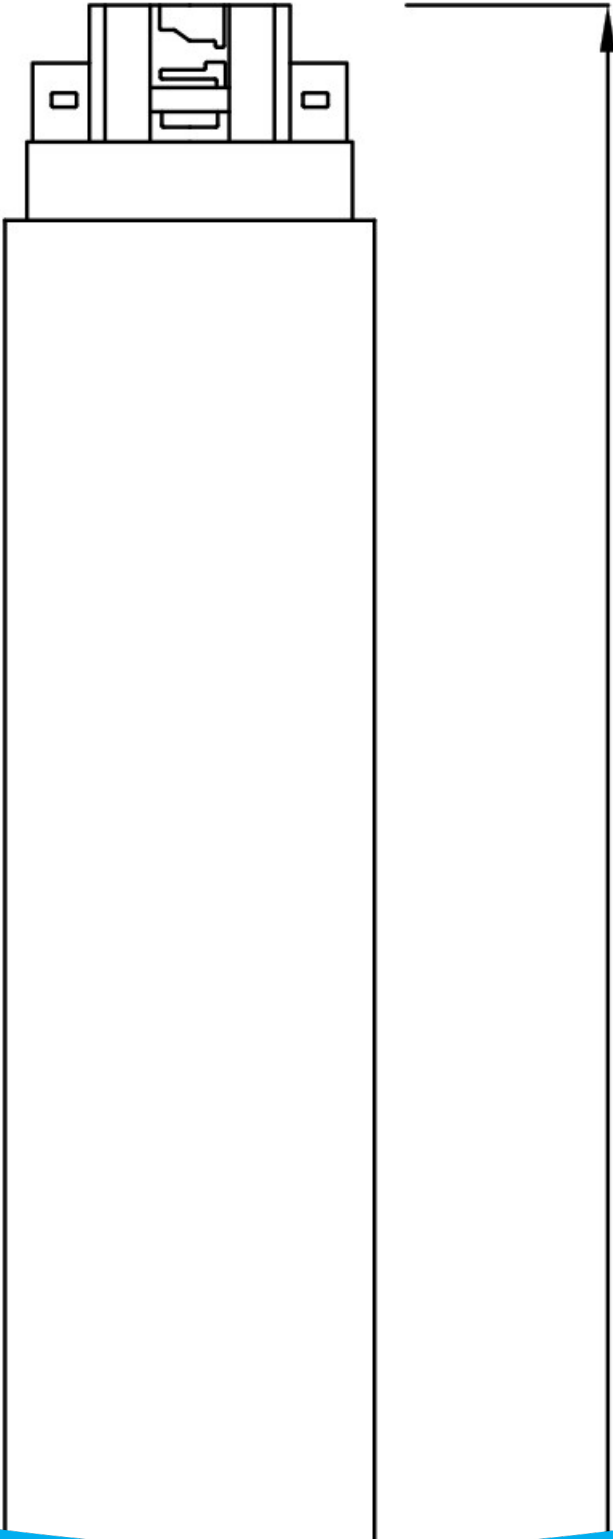

PRODUCT INFORMATION

Submersible borehole pump kit with pump body and motor, power supply cable, cord and control box.

Pump maximum diameter: 99 mm

Maximum amount of sand: 150 g/m³

Installation: Fixed in vertical position or horizontal installation with a cooling sleeve.

Motor: 4OL oil-filled two-pole asynchronous DAB motor

Last modified date: 26/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>