DAB Submersible borehole pump stainless steel 304 1" female thread 5,1A 230VAC with 15m cable and control box booster type Micra 75M oil cooling (7030893)



DAB
MAKING WATER EASY

bosta
bringing water to life


TECHNICAL SPECIFICATIONS


Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	noryl GFN2
Connection	female thread
Type	oil cooling
Voltage	230VAC
Max. temperature	35 °C
Outer ø	74 mm
Minimum medium temperature (continuous)	0 °C
Max flow rate	2.7 m^3/h
Press	1 "
BEP Capacity	1.8
IP value	IP68
Type	Micra 75M
Output Power	0,75 HP
Model	with 15m cable and control box booster

Max. head	68 m
Size	1"
WebshopURL	https://www.bosta.com/en-gb/dab-submersible-borehole-pump-stainless-steel-304-1-female-thread-5-1a-230vac-with-15m-cable-and-control-box-booster-type-micra-75m-oil-cooling-7030893
Weight	10.2 kg
Power	0.55 kW
Impellers	23
Ampere	5,1 A
BEP Head	42
PORlh	52.9
PORhh	30.3
PORlq	1.3
PORhq	2.2

DIMENSIONS

Db	74 mm
H-1	1145 mm
ØDi-1	1 "

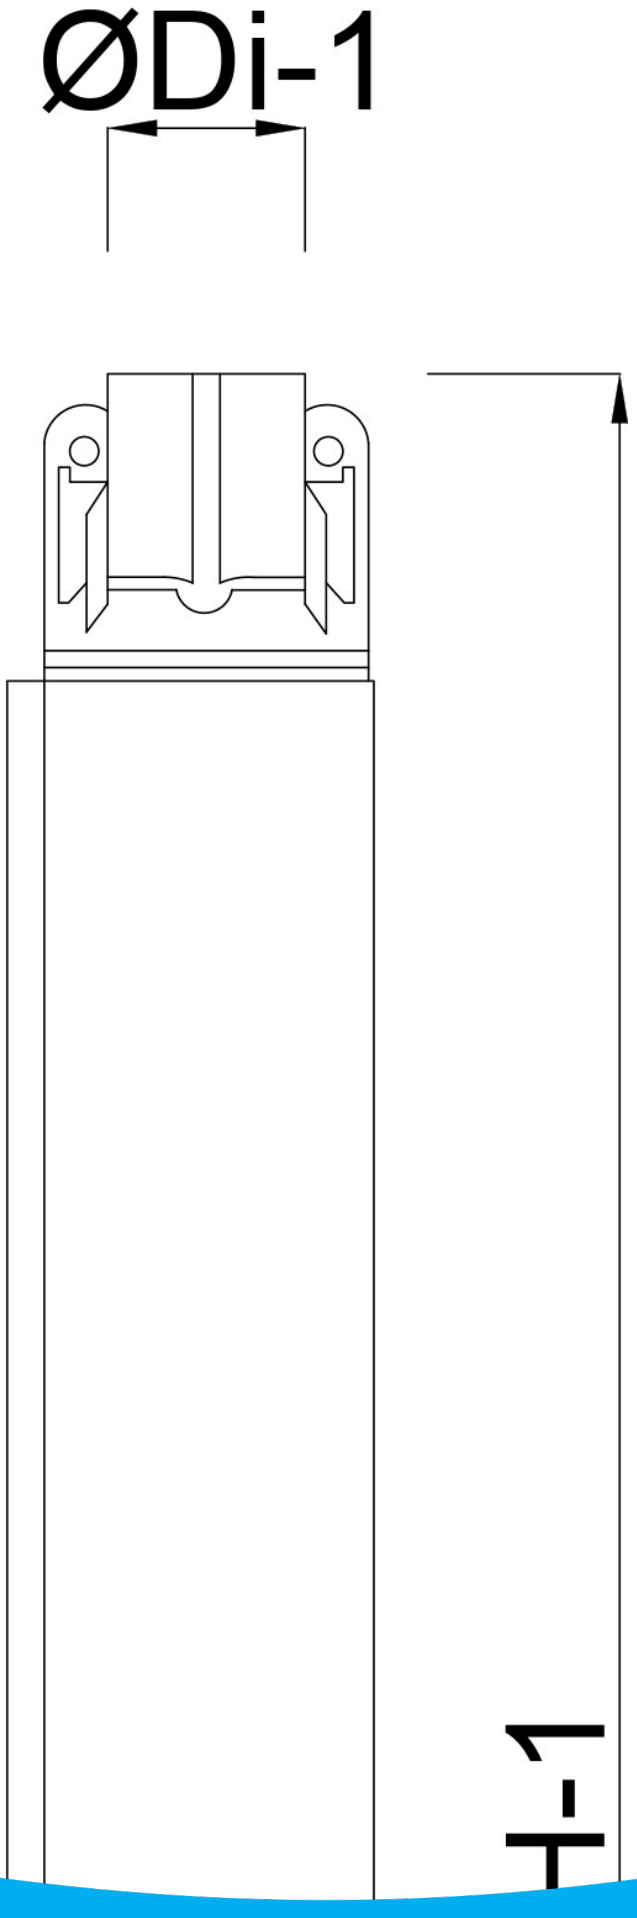

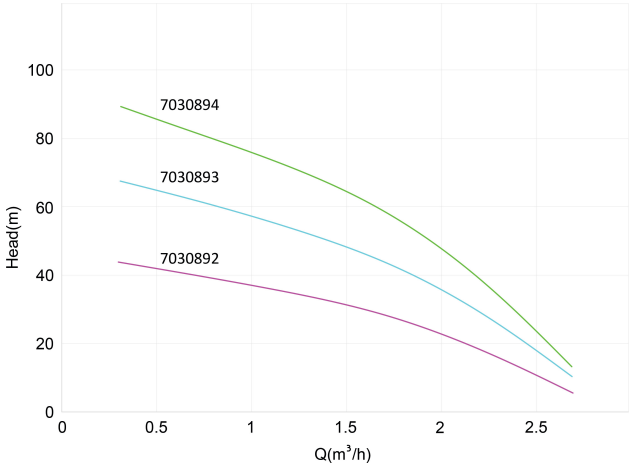

bosta
bringing water to life

PRODUCT INFORMATION

Includes assembled 15m cable and control box booster.
Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.
Maximum permitted amount of sand: 40 g/m3.
Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

Last modified date: 02/11/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com