


**PSH Pool pump polypropylene  
2" female thread 4,8A 230VAC  
black type ND.2 19M (7032222)**

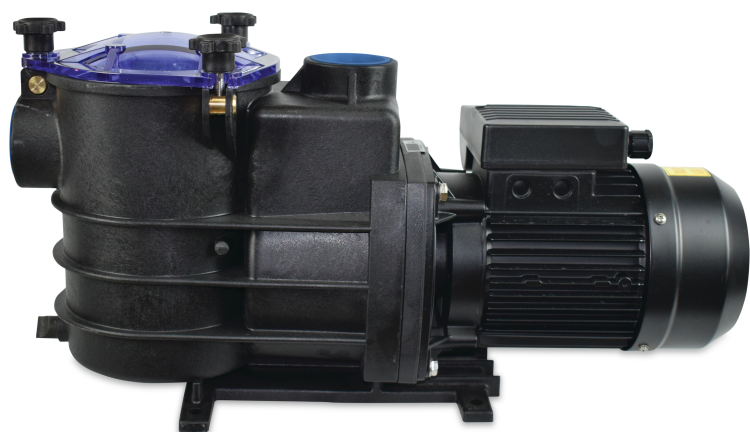

 P S H

# TECHNICAL SPECIFICATIONS

Colour	black
Shaft	stainless steel 316
Pump body	PP/GF30
Material impeller 1	noryl
Material cover	polycarbonate
Material seal	carbon/ceramic
Connection	female thread
Max. temperature	40 °C
Width	220 mm
Height	288 mm
Frequency	50 Hz
IP value	IP55
Motor RPM	2900
Type	ND.2 19M
Capacity	24,3 m <sup>3</sup> /h
Output Power	1 HP
Max. head	16 m

Size 2"



Length 551 mm

Voltage 230VAC

Weight 13.7 kg

Power 0.75 kW

Ampere 4,8 A

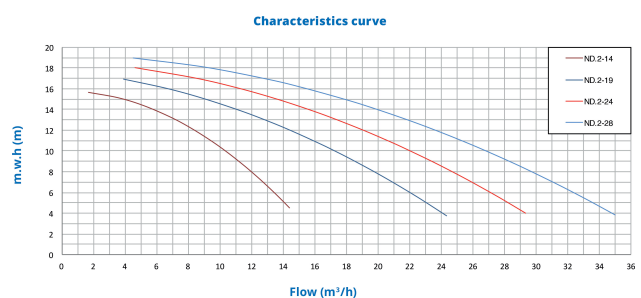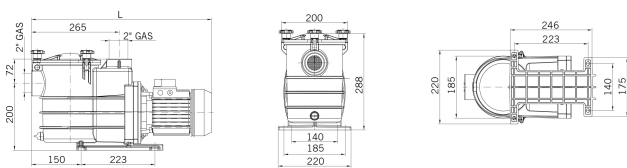

## PRODUCT INFORMATION

High corrosion-resistant materials and quality manufacture have combined to produce a highly reliable, self priming pool pump for your swimming pool.

Features:

- Connection: female thread
- Self-priming up to 4mwh
- Suitable for operation with salt chlorinators and sea water up to 3,5% (35gr/l)
- High efficiency three phase motor class IE3 according to standard IEC 60034-30-1
- Thermal protection incorporated in single-phase version
- Insulation Class: F
- Protection: IP55
- Motor: 50Hz/2900 rpm with option of 60Hz
- Max water temperature: 40°C

- Interchangeable with PSH ND1 pump

**Last modified date: 26/05/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>