


Seko Commercial pool control unit 2bar 110/230VAC type Kontrol Guard Fort AKS800 (7039289)

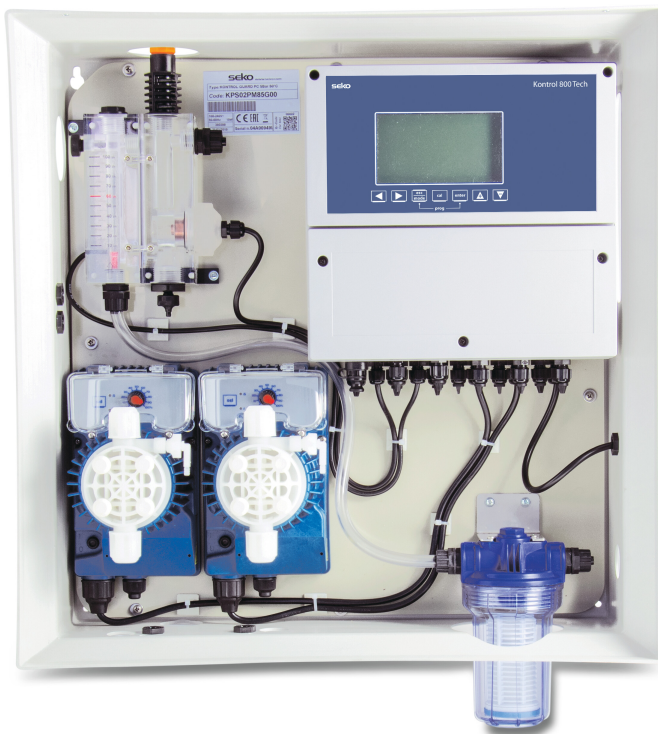

seko

TECHNICAL SPECIFICATIONS

Voltage	110/230VAC
Pressure	2 bar
Type	Kontrol Guard Fort AKS800
Flow range	18 ltr/h

PRODUCT INFORMATION

Kontrol Guard Fort is a dedicated multi-parameter controller that activates dosing pumps using a proportional dosing method to overcome challenges encountered in swimming pool applications. It is a complete panel system for swimming pool water treatment, integrating essential components including pH controller, probe holder and chlorine dosing pumps into a single wall-mounted solution. Kontrol Guard Fort allows for accurate pH regulation by dosing proportionally based on parameter readings. The system's graphic display and keypad allow for the simple setting of parameters for reduced installation time, while users can view values for parameter measure, temperature and relay status simultaneously.

Features:

- All in one box with increased instrument protection
- Graphic display 5" (240x128 pixel) for easier reading
- Control unit with full parameter access for complete monitoring
- Communication via Serial Port RS485 by Modbus RTU/Ascii protocol for remote control interface
- Easy setting up parameters for quick technical overview
- KommBox or KommSpot gateway devices enables access to SekoWeb
- AKL603 suits pools indoor 50 – 650m³, outdoor 50 – 600m³
- AKL800 suits pools indoor 110 – 900m³, Outdoor 100 – 850m³

Last modified date: 27/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>