

**Submersible borehole pump 1
1/2" female thread 11,9A
230VAC with 20m cable type
SDM 3/23 with capacitor - oil
cooling (7031117)**



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	Noryl
---------------------	-------

Model	with 20m cable
-------	----------------

Connection	female thread
------------	---------------

Type	with capacitor - oil cooling
------	------------------------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Outer ø	90 mm
---------	-------

Max flow rate	6 m ³ /h
---------------	---------------------

Press	1,5 "
-------	-------

Maximum ambient temperature 35 °C	
-----------------------------------	--

BEP Capacity	4.8
--------------	-----

IP value	IP68
----------	------

Type	SDM 3/23
------	----------

Output Power	2,4 HP
--------------	--------

Max. head	130 m
-----------	-------

Size	1 1/2"
------	--------

Weight	23 kg
--------	-------

Power	1.8 kW
-------	--------

Impellers	23
-----------	----

Height	1670 mm
--------	---------

Ampere	11,9 A
--------	--------

BEP Head	62.5
----------	------

PORlh	101
-------	-----

PORhh	24
-------	----

PORlq	3.36
-------	------

PORhq	5.76
-------	------



DIMENSIONS

Db	90 mm
----	-------


H-1	1670 mm
-----	---------

ØDi-1	1 1/2 "
-------	---------

ØDi-1

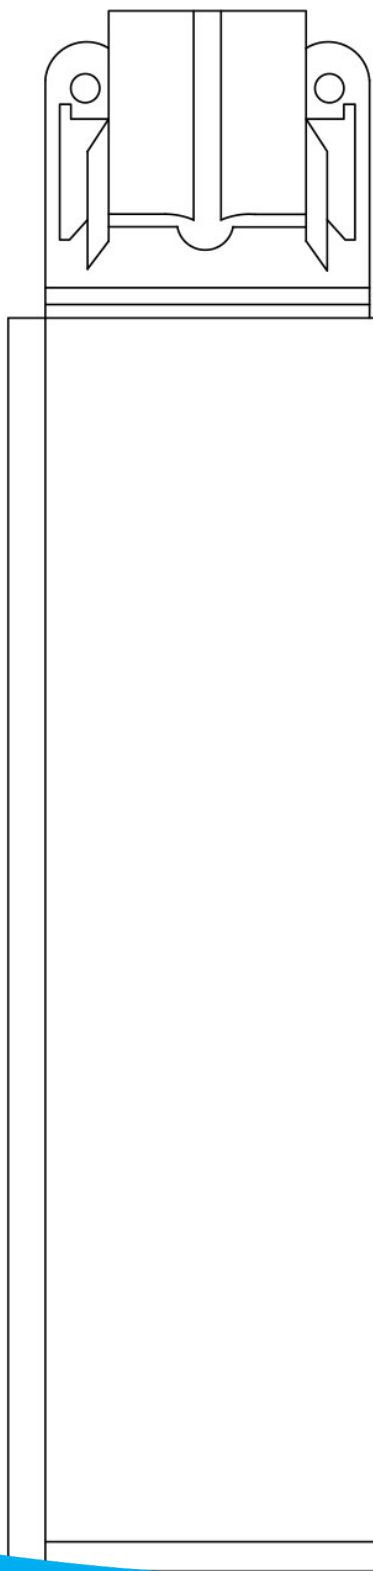

H-1

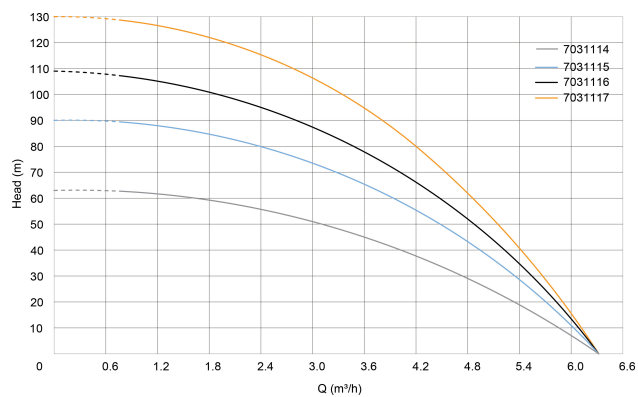

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 21/08/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>