

**Profec Ball valve PVC-U 90 mm  
glue socket 10bar 24-  
240VAC/VDC grey type Safe  
600 with actuator J4C S55  
(7018925)**



# TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 600 with actuator J4C S55
Material	PVC-U
Operation	actuator
Housing construction	3-part
Switching time	15 sec.
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Voltage	24-240VAC/VDC
Max. temperature	60 °C
Maximum ambient temperature	-10 - +60 °C
Pressure	10 bar
Size	90 mm
Factory pre-adjustment	  bar

## DIMENSIONS


Ct-1 296 mm

Lb 249 mm

ØDf 80 mm

ØDi-1 90 mm

ØDi-2 90 mm

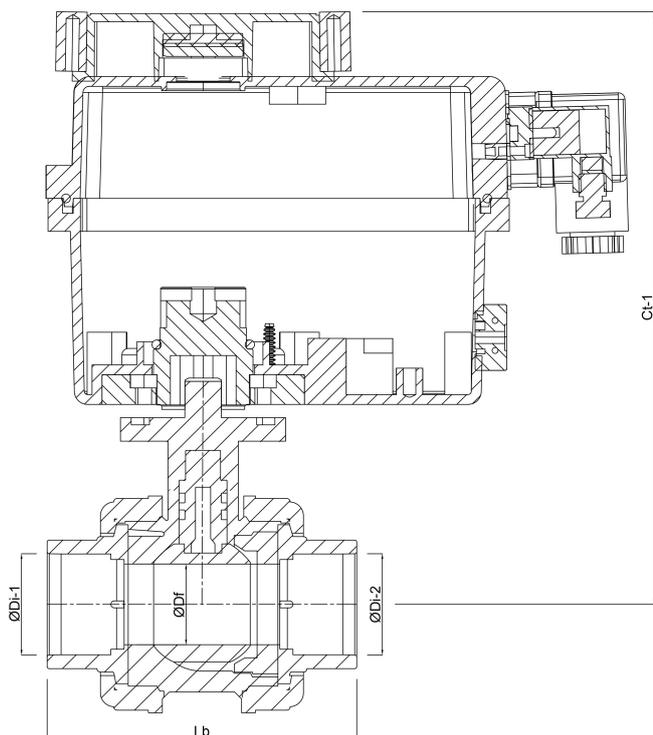

## PRODUCT INFORMATION

Connection according to DIN 43650.

**Last modified date: 10/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>