

**Profec Ball valve PVC-U 32 mm  
glue socket 16bar 24-  
240VAC/VDC grey type Safe  
600 with Actuator J4C S20  
(7018920)**



# TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 600 with Actuator J4C S20
Material	PVC-U
Operation	actuator
Housing construction	3-part
Switching time	15 sec.
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Voltage	24-240VAC/VDC
Max. temperature	60 °C
Maximum ambient temperature -10 - +60 °C	
Pressure	16 bar
Size	32 mm

## DIMENSIONS


Ct-1	230.5 mm
------	----------

Lb 126 mm

ØDf 25 mm

ØDi-1 32 mm

ØDi-2 32 mm

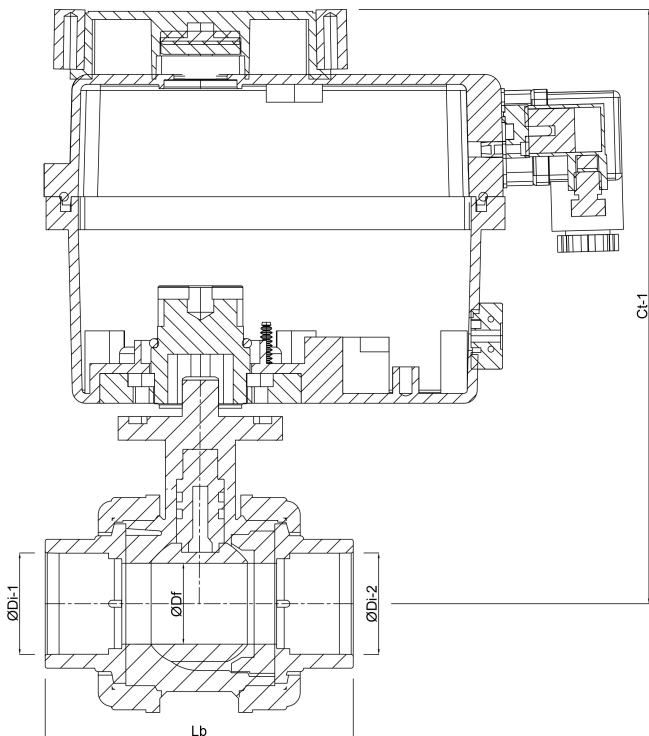

## PRODUCT INFORMATION

Connection according to DIN 43650

**Last modified date: 09/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road

Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>