

**DAB Multi-stage centrifugal
pump stainless steel 304 1"
female thread 6,3A 230VAC
green self priming type
EUROINOX 50/50M (7030922)**



TECHNICAL SPECIFICATIONS

Colour	green
Material	stainless steel 304
Material impeller 1	technopolymer
Model	self priming
Connection	female thread
Max. temperature	35 °C
Width	174 mm
Minimum medium temperature 0 °C (continuous)	
Height	203 mm
Press	1 "
Maximum ambient temperature 40 °C	
Suction	1 "
Minimum ambient temperature 0 °C	
Type	EUROINOX 50/50M
Output Power	1,36 HP
Max. head	72 m

Size	1"
Length	384 mm
Voltage	230VAC
Weight	15.5 kg
Power	1 kW
Max flow rate	4.8 m ³ /h
BEP Capacity	3.61
BEP Head	44.3
Packaging dimensions L/W/H	480 x 212 x 265 mm

DIMENSIONS



Cb-1	143 mm
Cl-1	166 mm
G-1	111 mm
H-1	203 mm
L	384 mm
Mr	241 mm
O	9 mm
W-1	174 mm

ØDi-1

1 "

ØDi-2

1 "

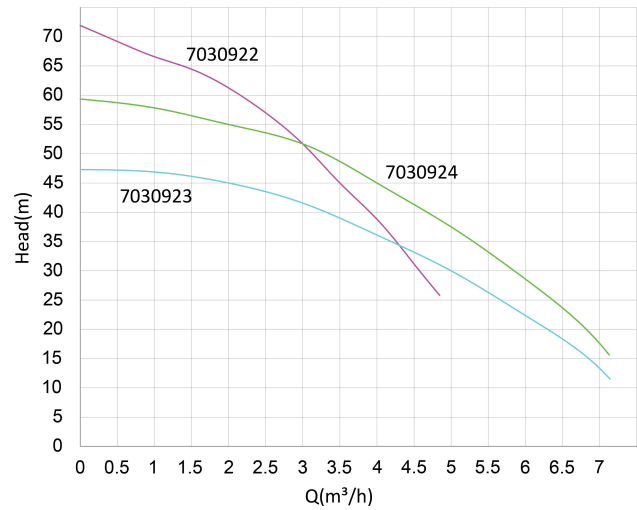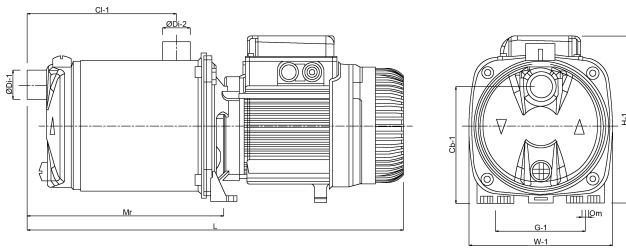

PRODUCT INFORMATION

Installation: fixed or portable in a horizontal position.

Supplied without cable, installation should be done by a qualified electrician.

Last modified date: 26/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>