


Profec Foot valve spring loaded PVC-U 110 mm glue socket 10bar DN80 grey (0111538)

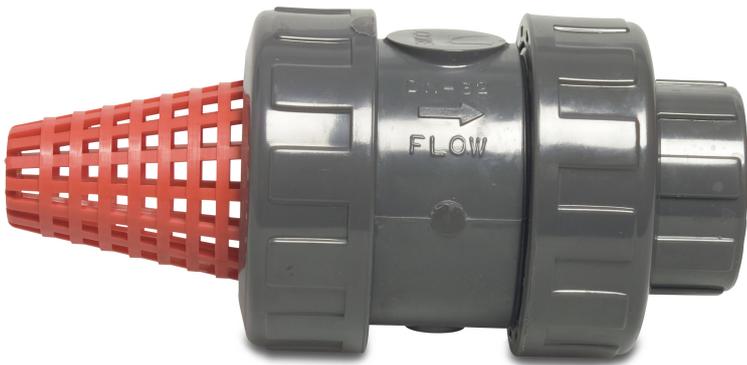

TECHNICAL SPECIFICATIONS

| | |
|-------------------|---------------------|
| Colour | grey |
| Material | PVC-U |
| Material (spring) | stainless steel 302 |
| Material housing | PVC-U |
| Material seal | EPDM |
| Connection | glue socket |
| Temperature range | 0°C - 60°C |
| Opening pressure | 0,1 bar |
| Size | 110 mm |
| Length | 367 mm |
| DN | 80 |
| Outer ø | 179 mm |
| Pressure | 10 bar |

DIMENSIONS

| | |
|----|--------|
| L | 367 mm |
| L1 | 61 mm |

Last modified date: 07/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>