Norsup Sand filter fibreglass reinforced polyester 50 mm glue socket 2,5bar grey type SupraV3 600 SM (7035853)



NORSUP



TECHNICAL SPECIFICATIONS


Colour	grey
Material	fibreglass reinforced polyester
Connection	glue socket
Pressure	2,5 bar
Max. temp.	50 °C
Туре	SupraV3 600 SM
Capacity	14 m³/h
Size	50 mm
Diameter	600 mm
Weight	23 kg
Sand	140 kg
Filter area	0.28 m ²
Max. pool vol.	90 m ³

DIMENSIONS

Е	450 mm
А	1010 mm



В	125 mm
С	465 mm
D	620 mm
F	90 mm
G	550 mm

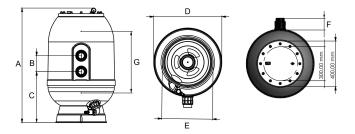

PRODUCT INFORMATION

The Norsup filter type Supra is made of sturdy fibreglass reinforced polyester with a weather-resistant gel coat. Due to the 290mm wide opening, sand changes can be carried out without any difficulty. Using the twelve threaded bolts, the transparent cover can be securely screwed to the filter body. The transparent cover helps determine how much dirt is in the filter.

Features:

- Exclusively from Bevo/Bosta
- · High quality fibreglass reinforced polyester
- UV-resistant
- 290mm opening for easy sand change
- Maximum working pressure up to 3 bar
- Praher 6-way valve included
- 10 years tank warranty + 5 years valve warranty
- Certified according to DIN-EN 16713

Last modified date: 07/10/2025



Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

