

**Submersible borehole pump 1
1/2" female thread 9,9A
230VAC with 20m cable type
SDM 3/18 with capacitor - oil
cooling (7031116)**



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
Material impeller 1	noryl
Model	with 20m cable
Connection	female thread
Type	with capacitor - oil cooling
Voltage	230VAC
Max. temperature	35 °C
Outer ø	90 mm
Max flow rate	6 m ³ /h
Press	1,5 "
Maximum ambient temperature 35 °C	
BEP Capacity	4.8
IP value	IP68
Type	SDM 3/18
Output Power	2 HP
Max. head	109 m
Size	1 1/2"

Weight 18 kg

Power 1.5 kW

Impellers 19

Height 1410 mm

Ampere 9,9 A

BEP Head 52.2

PORlh 83

PORhh 21

PORlq 3.36


PORhq 5.76

DIMENSIONS

Db 90 mm

H-1 1410 mm

ØDi-1 1 1/2 "

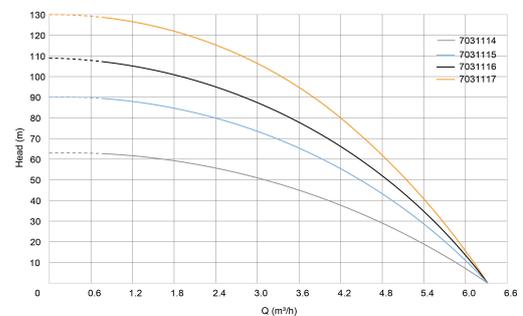

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 08/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>