Submersible borehole pump 1 1/2" female thread 9,9A 230VAC with 20m cable type SDM 3/18 with capacitor - oil cooling (7031116)

bosta
bringing water to life

TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
Material impeller 1	Noryl
Model	with 20m cable
Connection	female thread
Type	with capacitor - oil cooling
Voltage	230VAC
Max. temperature	35 °C
Outer ø	90 mm
Max flow rate	6 m^3/h
Press	1,5 "
Maximum ambient temperature	35 °C
BEP Capacity	4.8
IP value	IP68
Type	SDM 3/18
Output Power	2 HP
Max. head	109 m
Size	1 1/2"

Weight	18 kg
Power	1.5 kW
Impellers	19
Height	1410 mm
Ampere	9,9 A
BEP Head	52.2
PORlh	83
PORhh	21
PORlq	3.36
PORhq	5.76

DIMENSIONS

Db	90 mm
H-1	1410 mm
ØDi-1	1 1/2 "

bosta
bringing water to life



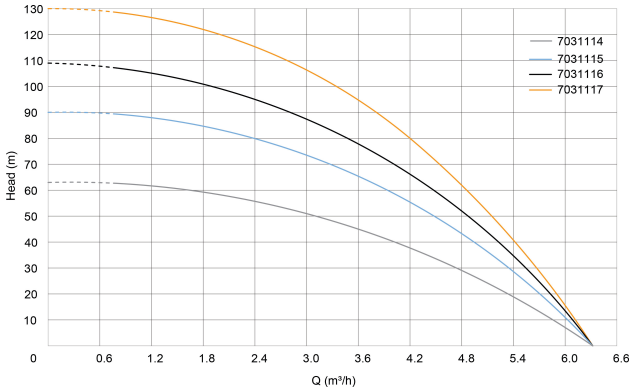

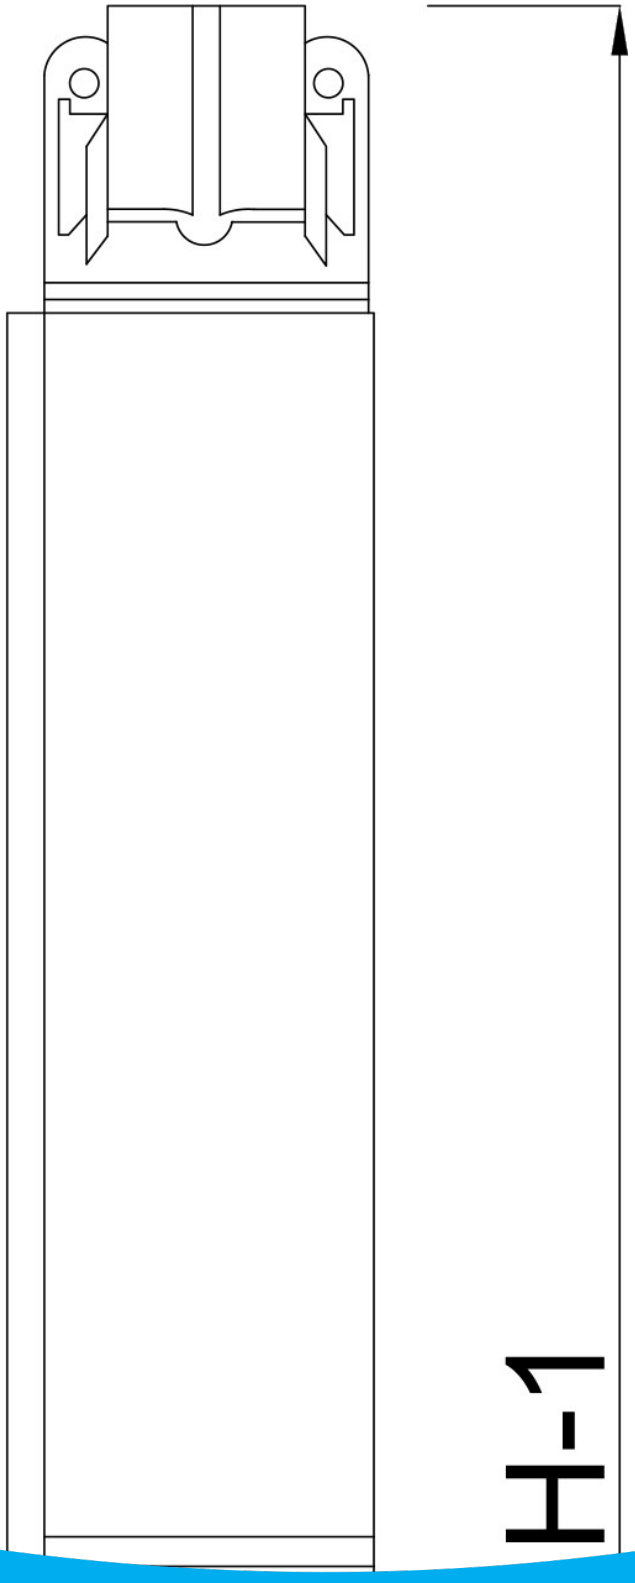

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.
Increased resistance to sand.
Maximum amount of sand: 300 g/m3.
Installation: Fixed in vertical position.
20 mtr cable, DIN plug without control box

Last modified date: 21/08/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life