

**Profec Butterfly valve ductile
iron (GGG40) epoxy coating
DN80 flange 10bar DN80 blue
PN6/10/16 type 600 (0401852)**



TECHNICAL SPECIFICATIONS

Colour blue

Type 600

Material ductile iron (GGG40)

Surface treatment epoxy coating

Operation lever

Colour lever black

Handle material malleable cast iron

Material valve ductile iron

Material spindle stainless steel 316

Seat material EPDM

Material housing ductile iron (GGG40)

Material seal EPDM

Connection flange

Flange PN6/10/16

Temperature range 0°C - 90°C

Pressure 10 bar

Size DN80

DN 80

Width 45 mm

Height 313 mm

Torque 17 Nm

Bolt hole 18 mm

Holes 8

DIMENSIONS

Construction length din 3202 k1, iso 5752


Ct-1 209 mm

PCD 150/160 mm

R 260 mm

W-1 45 mm

W-2 90 mm

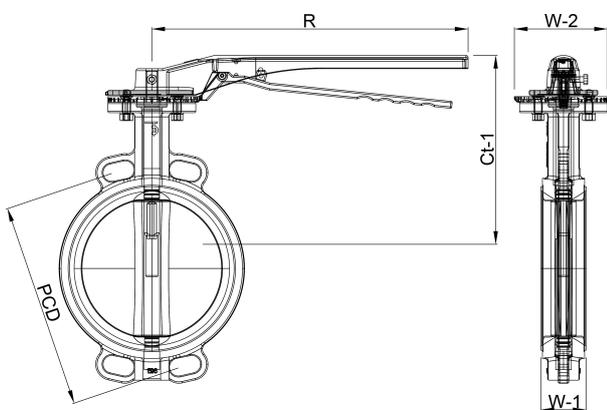

Last modified date: 09/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>