Profec Ball valve PVC-U 63 mm glue socket 16bar DN50 grey type Safe 600 (0112106)



PROFEC

bosta
bringing water to life


TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 600
Material	PVC-U
Operation	lever
Colour lever	red
Handle material	PVC-U
Housing construction	3-part
Ball material	PVC-U
Material spindle	PVC-U
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Max. temperature	60 °C
Minimum medium temperature (continuous)	0 °C
Pressure	16 bar
Size	63 mm

WebshopURL	https://www.bosta.com/en-gb/profec-ball-valve-pvc-u-63-mm-glue-socket-16bar-dn50-grey-type-safe-600-0112106
DN	50

DIMENSIONS

Ct-1	107 mm
Lb	190 mm
R	74 mm
ØDf	50 mm
ØDi-1	63 mm
ØDi-2	63 mm

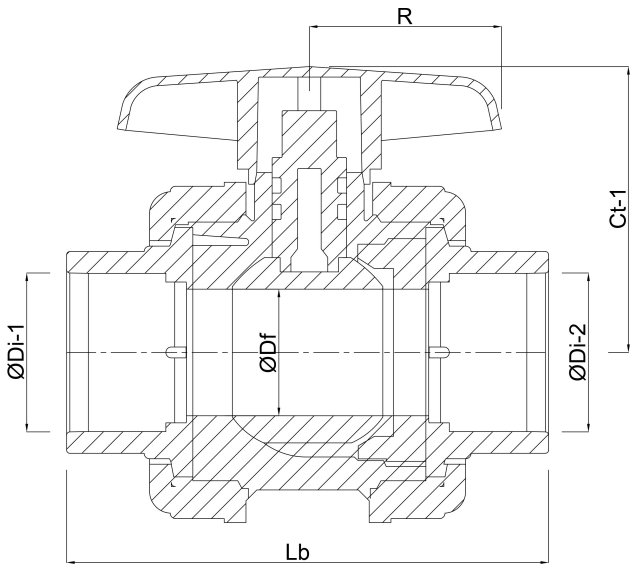

PRODUCT INFORMATION

With secure ball.

Last modified date: 31/10/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life