

Flotide Sand filter
PE/fibreglass-reinforced
polyester 63 mm / 2"
metric/imperial glue socket
2,5bar grey type S800R
(0891903)



FLOTIDE



bosta
bringing water to life

TECHNICAL SPECIFICATIONS

Colour	grey
Material	PE/fibreglass-reinforced polyester
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	S800R
Capacity	24 m ³ /h
Size	63 mm / 2"
Diameter	820 mm
Weight	22 kg
Sand	355 kg
Filter area	0.5 m ²
Max flow rate	24 m ³ /h
Max. pool vol.	125 m ³

DIMENSIONS

A	1020 mm
---	---------


B 32 "

B 32 " inch

B 820 mm

C 696 mm

D 610 mm

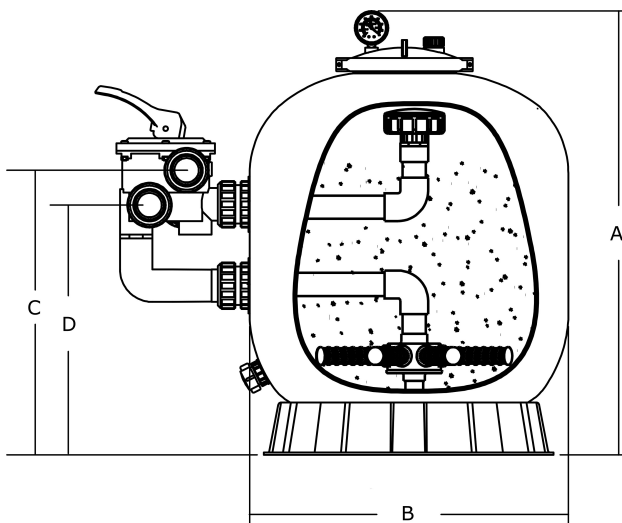

PRODUCT INFORMATION

PE lined fibreglass reinforced polyester tank with unequalled strength and durability equipped with side-mount 6-way valve.

- Made of fibreglass and polyester (DSM resin). Internal PE lining
- Top diffuser ensures even distribution of water over the top of the sand bed
- The non-corrosive materials are suitable for all-weather performance
- Easy-to-use multi-port valve lets you select any of the valves/filter operations with a simple lever-action
- With easy assembling ring-lock transparent lid (complete with spinners)
- UV resistant surface allows the filter to work under direct sunlight
- Warranty period: 2 years

Last modified date: 24/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>