

**Submersible pump stainless
steel 304 1" x 1 1/2" x 3/4" hose
tail x male thread x hose tail
5,2A 230VAC blue AUTO type
Multi IP Multi stage (7031124)**



TECHNICAL SPECIFICATIONS

Colour	blue
--------	------

Type	Multi IP
------	----------

Material	stainless steel 304
----------	---------------------

Output Power	1,5 HP
--------------	--------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl
---------------------	-------

Model	AUTO
-------	------

Connection	hose tail x male thread x hose tail
------------	-------------------------------------

Type	Multi stage
------	-------------

Float	not included
-------	--------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Power	1 kW
-------	------

MWC	40
-----	----

Ampere	5,2 A
--------	-------

Max flow rate	6 m ³ /h
---------------	---------------------

Maximum ambient temperature	40 °C
-----------------------------	-------

Minimum ambient temperature 0 °C

Size 1" x 1 1/2" x 3/4"

BEP Capacity 3.6

BEP Head 27.5

PORlh 35

PORhh 22

PORlq 2.52



PORhq 4.32

DIMENSIONS

H-1 580 mm

ØDi-1 1 "

Db 200 mm

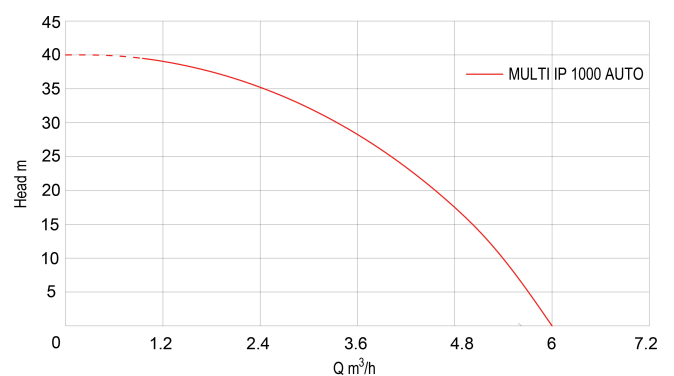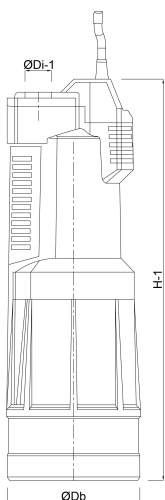

PRODUCT INFORMATION

For clean water only.

Max. immersion depth: 7 metres.

High pressure submersible pump designed for irrigation.

Comes with a cooling jacket so they can be partially submerged.

Built-in pressure switch to start pressure set for pump, start at 3bar and stop at 5.6bar.

Screen filter built at the bottom of the pump allows the water to be pumped down to 5cm.

10 mtr cable and DIN plug.

It is recommended to use a pressure tank to prevent switch from oscillating.

Last modified date: 07/10/2025

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>