

Waterco Commercial sand filter fibreglass 2"/63mm flange 2,5bar grey type SMD750 (7029498)




WATERCO
EUROPE LTD
Water, the liquid of life

TECHNICAL SPECIFICATIONS

Colour	grey
Material	fibreglass
Connection	flange
Pressure	2,5 bar
Max. temp.	50 °C
Type	SMD750
Capacity	13 m ³ /h
Size	2"/63mm
Sand	670 kg
Filter area	0.44 m ²
Max flow rate	18 m ³ /h
Max. pool vol.	65 m ³

DIMENSIONS

A	613 mm
B	772 mm
C	1689 mm

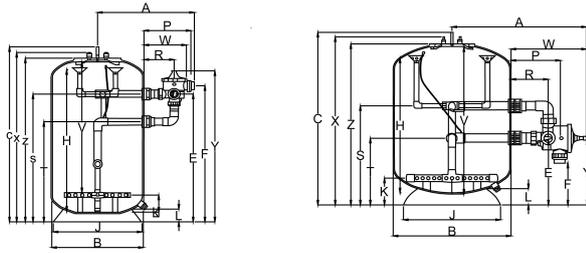

PART NO.	SIZE	A mm	B mm	C mm	W mm	H mm	P mm	E mm	F mm	K mm
702490	2.50 mm	617	772	1089	334	362	91	1220	1328	15
702495	3.750 mm	824	103	1878	570	383	848	1406	1516	180
702500	5.000 mm	978	1119	1900	570	383	848	1190	1210	200
702501	3.750 mm	977	1239	1835	570	383	548	1154	1264	180
702502	5.000 mm	1080	1442	1889	570	383	848	1224	1274	230
702503	3.750 mm	1184	1644	1904	570	383	548	1171	1261	200
702504	4.710 mm	1185	1644	1884	643	474	839	1197	1218	180
702505	4.710 mm	1685	1889	1885	643	474	624	121	413	225
702506	4.710 mm	1954	2042	2093	643	474	629	758	420	300

PART NO.	SIZE	V mm	H mm	L mm	X mm	Y mm	Z mm	J mm	S mm	T mm
702490	2.50 mm	1425	1383	120	1850	1480	1993	678	1229	1033
702495	3.750 mm	1580	1447	135	1830	1180	1180	780	1406	1050
702500	5.000 mm	1900	1470	176	1845	1482	1775	1045	1100	744
702501	3.750 mm	1660	1400	176	1850	1536	1180	1045	1164	768
702502	3.750 mm	1810	1580	218	1870	1586	1650	1200	1204	848
702503	3.750 mm	1810	1580	218	1900	1530	1830	1200	1151	756
702504	4.710 mm	1815	1430	218	1900	787	1839	1200	1180	767
702505	4.710 mm	1710	1470	315	1900	787	1830	1785	1183	767
702506	4.710 mm	1765	1650	245	1915	785	1800	1785	1180	768

PRODUCT INFORMATION

Waterco commercial sand filter SMD is a micron fibreglass filter which embody the latest in fibreglass winding technology. The digitally controlled filament winding machine faultlessly winds continuous strands of high quality fibreglass filament under controlled tension to create a seamless one-piece vessel with refined consistency and superior quality. There are no welds or seams or special tank linings which can corrode or electrolyse. Its "Fish Tail" lateral configuration eliminates any "dead legs" by improving water flow distribution through the filter bed. SMD model is available in 2.5 bar, 4 bar, 6 bar, 8 bar and 10 bar pressure ratings.

Features:

- 1m bed depth
- Ultra smooth bobbin finish
- Large double yoke lid with lifting eye
- Large clear sight glass
- Large stable base
- Quick connect unions
- Fish Tail lateral
- Optional nozzle plate
- 10 years tank warranty

Last modified date: 10/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>