

**Flotide Sand filter polyester  
gelcoated 50 mm / 1 1/2"  
metric/imperial glue socket  
2,5bar green type SMG650  
(7011875)**



**FLOTIDE**

# TECHNICAL SPECIFICATIONS

Colour	green
Material	polyester gelcoated
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	SMG650
Size	50 mm / 1 1/2"
Diameter	666 mm
Weight	24.5 kg
Sand	150 kg
Filter area	0.33 m <sup>2</sup>
Max flow rate	16.5 m <sup>3</sup> /h
Max. pool vol.	82.5 m <sup>3</sup>


## DIMENSIONS

A	943 mm
B	25 " inch

B 666 mm

C 535 mm

D 472 mm

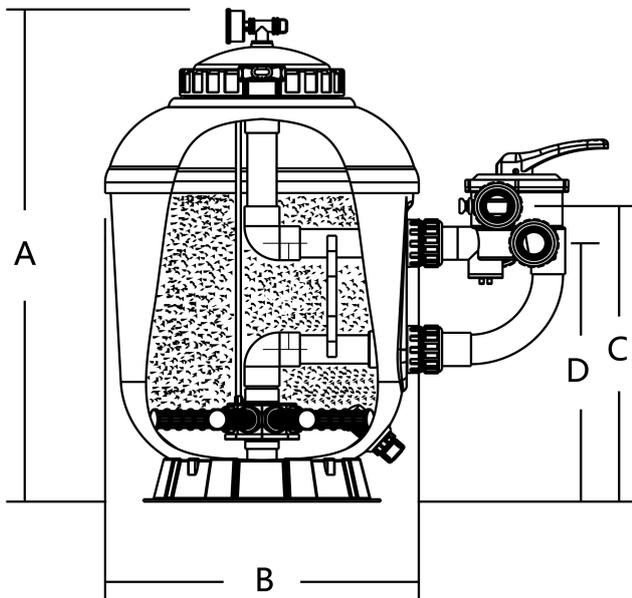

## PRODUCT INFORMATION

This Gelcoat filter tank has been well-received by the industry due to the durable, trustworthy performance and smooth gelcoat fibreglass finish. With UV-resistant material used, it is able to operate under prolonged sunlight for years of reliability. "SMG" Series side mount filters are equipped with a six-position, side mount multiport valve and ABS laterals. Switch off the pump before each lever action.

- Non corrosive gel coat fibreglass tank
- Smooth finish
- ABS internal pipe work construction
- Transparent lid provides clear view of filter media
- Air release valve
- 6-way multiport sidemount valve
- Warranty period: 2 years

**Last modified date: 09/03/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>