

**Flotide Sand filter polyester
gelcoated 63 mm / 2"
metric/imperial glue socket
2,5bar green type SMG750
(7011876)**



FLOTIDE

TECHNICAL SPECIFICATIONS

Colour	green
Material	polyester gelcoated
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	SMG750
Size	63 mm / 2"
Diameter	770 mm
Weight	38 kg
Sand	250 kg
Filter area	0.44 m ²
Max flow rate	22.1 m ³ /h
Max. pool vol.	110.5 m ³


DIMENSIONS

A	1015 mm
B	30 " inch

B 770 mm

C 603 mm

D 517 mm

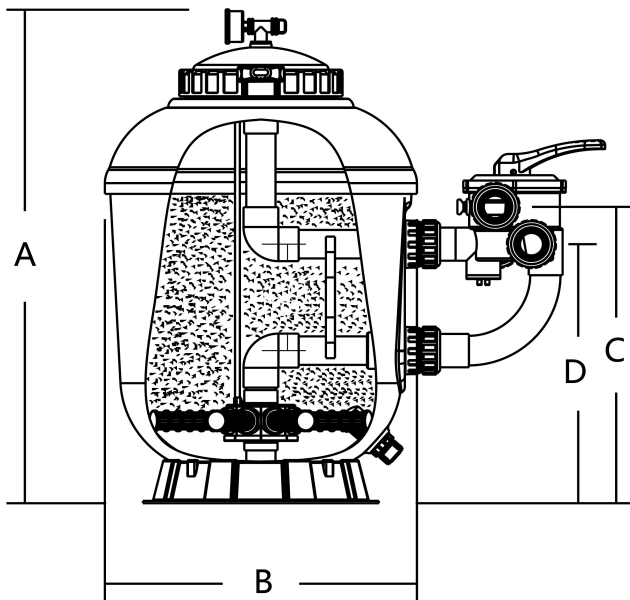

PRODUCT INFORMATION

This Gelcoat filter tank has been well-received by the industry due to the durable, trustworthy performance and smooth gelcoat fibreglass finish. With UV-resistant material used, it is able to operate under prolonged sunlight for years of reliability. "SMG" Series side mount filters are equipped with a six-position, side mount multiport valve and ABS laterals. Switch off the pump before each lever action.

- Non corrosive gel coat fibreglass tank
- Smooth finish
- ABS internal pipe work construction
- Transparent lid provides clear view of filter media
- Air release valve
- 6-way multiport sidemount valve
- Warranty period: 2 years

Last modified date: 09/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>