

**Profec Ball valve single union  
PVC-U 20 mm glue socket  
16bar DN15 grey type Safe 525  
(0112140)**



# TECHNICAL SPECIFICATIONS

Colour grey

Type Safe 525

Material PVC-U

Operation lever

Colour lever red

Handle material PVC-U

Housing construction 2-part

Material housing PVC-U

Material seal hytrel/EPDM

Connection glue socket

Max. temperature 60 °C

Minimum medium temperature 0 °C  
(continuous)

Pressure 16 bar

Size 20 mm

DN 15

# DIMENSIONS

Ct-1 46 mm


Lb 75 mm

R 35 mm

$\varnothing$ Df 15 mm

$\varnothing$ Di-1 20 mm

$\varnothing$ Di-2 20 mm

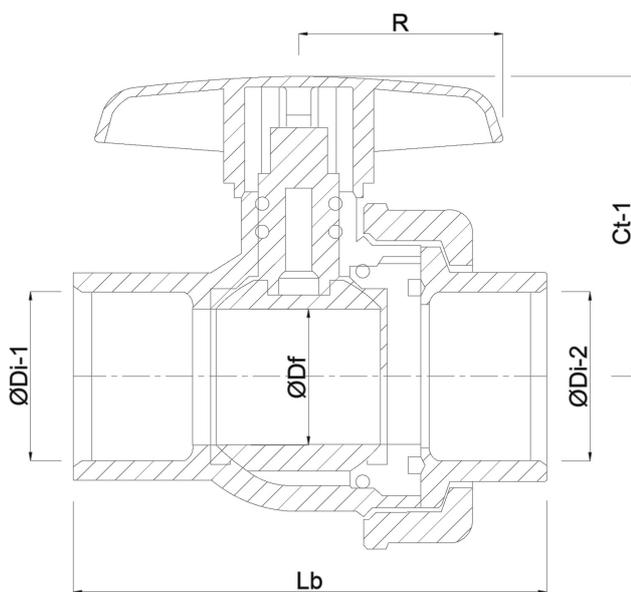

# PRODUCT INFORMATION

With secure ball.

**Last modified date: 23/05/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>