PSH Pool pump polypropylene 2" female thread 4A 230VAC black type ND.2 14M (7032220)

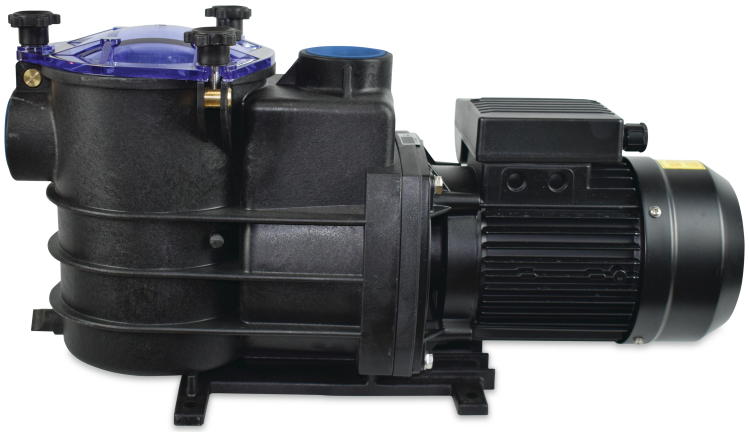

PSH

bosta
bringing water to life

TECHNICAL SPECIFICATIONS

Colour	black
Shaft	stainless steel 316
Pump body	PP/GF30
Material impeller 1	Noryl
Material cover	polycarbonate
Material seal	carbon/ceramic
Connection	female thread
Max. temperature	40 °C
Width	220 mm
Height	288 mm
Frequency	50 Hz
IP value	IP55
Motor RPM	2900
Type	ND.2 14M
Capacity	14,4 m^3/h
Output Power	0,8 HP
Max. head	16 m

Size	2"
Length	551 mm
Voltage	230VAC
Weight	13.6 kg
Power	0.6 kW
Ampere	4 A







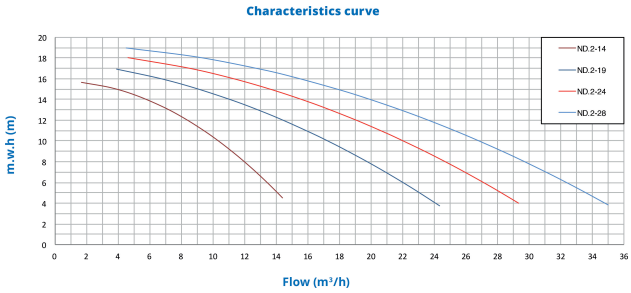

PRODUCT INFORMATION

High corrosion-resistant materials and quality manufacture have combined to produce a highly reliable, self priming pool pump for your swimming pool.

Features:

- Connection: female thread
- Self-priming up to 4mwh
- Suitable for operation with salt chlorinators and sea water up to 3,5% (35gr/l)
- High efficiency three phase motor class IE3 according to standard IEC 60034-30-1
- Thermal protection incorporated in single-phase version
- Insulation Class: F
- Protection: IP55
- Motor: 50Hz/2900 rpm with option of 60Hz
- Max water temperature: 40ºC

- Interchangeable with PSH ND1 pump

Last modified date: 21/08/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life