


**Foras Jet pump cast iron 1"  
female thread 7bar 1.9A  
230/400VAC blue self priming  
type JA 126 T (7034801)**

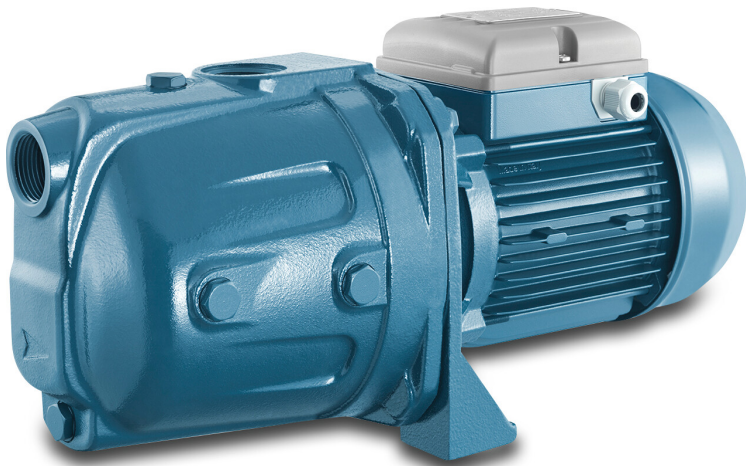

# TECHNICAL SPECIFICATIONS

|        |      |
|--------|------|
| Colour | blue |
|--------|------|

|          |           |
|----------|-----------|
| Material | Cast iron |
|----------|-----------|

|           |           |
|-----------|-----------|
| Pump body | Cast iron |
|-----------|-----------|

|       |              |
|-------|--------------|
| Model | self priming |
|-------|--------------|

|            |               |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

|      |        |
|------|--------|
| Seal | type A |
|------|--------|

|                  |       |
|------------------|-------|
| Max. temperature | 50 °C |
|------------------|-------|

Minimum medium temperature 0 °C  
(continuous)

|       |     |
|-------|-----|
| Press | 1 " |
|-------|-----|

Maximum ambient temperature 40 °C

|         |     |
|---------|-----|
| Suction | 1 " |
|---------|-----|

Minimum ambient temperature 0 °C

|      |          |
|------|----------|
| Type | JA 126 T |
|------|----------|

|                     |                     |
|---------------------|---------------------|
| Material impeller 1 | stainless steel 304 |
|---------------------|---------------------|

|           |        |
|-----------|--------|
| Max. head | 55.1 m |
|-----------|--------|

|      |    |
|------|----|
| Size | 1" |
|------|----|

|         |            |
|---------|------------|
| Voltage | 230/400VAC |
|---------|------------|

|       |         |
|-------|---------|
| Power | 0.88 kW |
|-------|---------|

|        |       |
|--------|-------|
| Ampere | 1.9 A |
|--------|-------|

|               |                       |
|---------------|-----------------------|
| Max flow rate | 4.2 m <sup>3</sup> /h |
|---------------|-----------------------|

|              |     |
|--------------|-----|
| BEP Capacity | 2.8 |
|--------------|-----|

|          |    |
|----------|----|
| BEP Head | 32 |
|----------|----|

|       |    |
|-------|----|
| PORlh | 23 |
|-------|----|

|       |      |
|-------|------|
| PORhh | 55.1 |
|-------|------|

|       |     |
|-------|-----|
| PORlq | 0.6 |
|-------|-----|

|       |     |
|-------|-----|
| PORhq | 4.2 |
|-------|-----|

## DIMENSIONS

|      |        |
|------|--------|
| Cb-1 | 150 mm |
|------|--------|

|      |        |
|------|--------|
| Cb-1 | 150 mm |
|------|--------|

|      |        |
|------|--------|
| Cb-2 | 195 mm |
|------|--------|

|      |        |
|------|--------|
| Cl-1 | 119 mm |
|------|--------|

|      |        |
|------|--------|
| Cr-1 | 140 mm |
|------|--------|

|      |       |
|------|-------|
| Ct-1 | 45 mm |
|------|-------|

|     |        |
|-----|--------|
| G-1 | 140 mm |
|-----|--------|

H 185 mm

L 410 mm

L 410 mm

LB 214 mm

LM 196 mm

Mr 214 mm



MW 150 mm

W 180 mm

W-1 180 mm

ØDi-1 1 "

ØDi-2 1 "

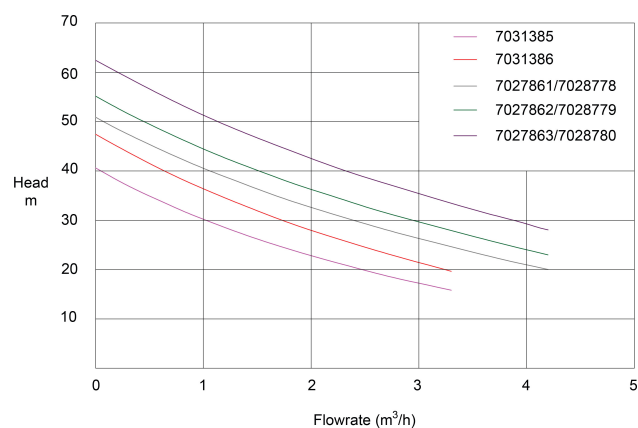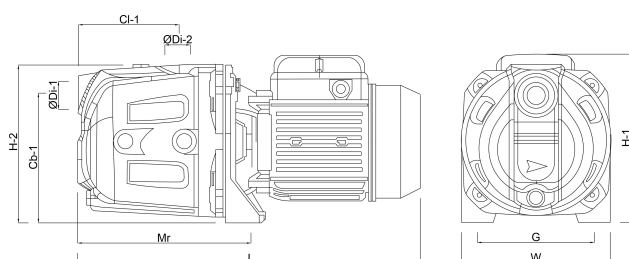

## PRODUCT INFORMATION

Pump will be supplied with cable and DIN plug.

**Last modified date: 21/08/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>