

Flotide Sand filter
PE/fibreglass-reinforced
polyester 50 mm / 1 1/2"
metric/imperial glue socket
2,5bar grey type S650R
(0891906)



FLOTIDE



bosta
bringing water to life

TECHNICAL SPECIFICATIONS

Colour	grey
Material	PE/fibreglass-reinforced polyester
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	S650R
Capacity	16 m ³ /h
Size	50 mm / 1 1/2"
Diameter	635 mm
Weight	25.5 kg
Sand	145 kg
Filter area	0.3 m ²
Max flow rate	16 m ³ /h
Max. pool vol.	80 m ³

DIMENSIONS

B	25 "
---	------


B 25 " inch

A 890 mm

B 635 mm

C 568 mm

D 505 mm

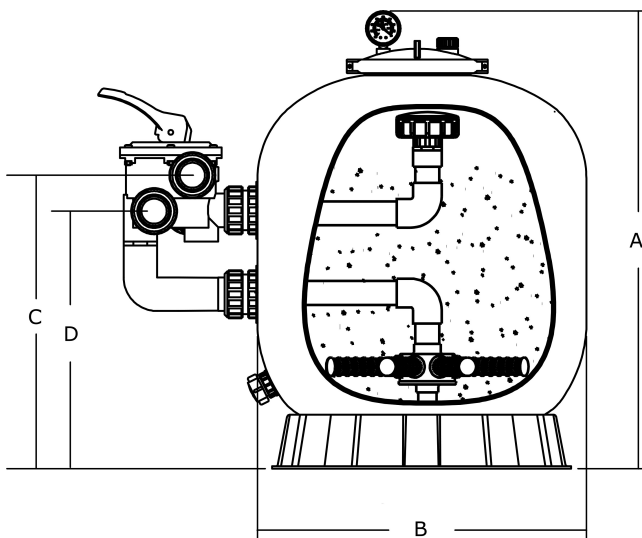

PRODUCT INFORMATION

PE lined fibreglass reinforced polyester tank with unequalled strength and durability equipped with side-mount 6-way valve.

- Made of fibreglass and polyester (DSM resin). Internal PE lining
- Top diffuser ensures even distribution of water over the top of the sand bed
- The non-corrosive materials are suitable for all-weather performance
- Easy-to-use multi-port valve lets you select any of the valves/filter operations with a simple lever-action
- With easy assembling ring-lock transparent lid (complete with spinners)
- UV resistant surface allows the filter to work under direct sunlight

- Warranty period: 2 years

Last modified date: 05/10/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>