


Rain Solenoid valve fibreglass reinforced nylon male thread 24VAC black type RN155 Plus L1 (7019175)

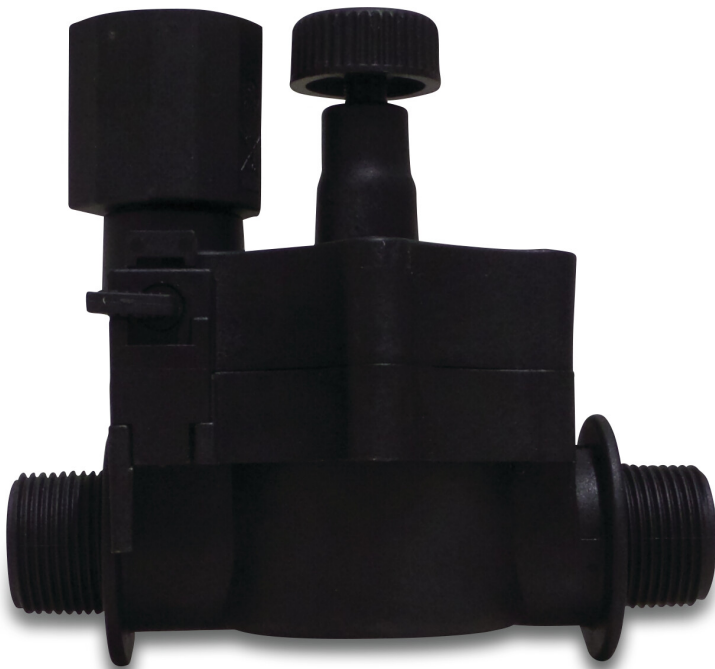

TECHNICAL SPECIFICATIONS

Colour	black
Type	RN155 Plus
Material	fibreglass reinforced nylon
Operation	indirect servo-operated
Indirect effect	yes
Material housing	fibre-reinforced plastic
Connection	male thread
Right-angled model	no
Voltage	24VAC
Temperature range	4°C - 70°C
Minimum pressure difference	0.3 bar
Frequency	50 Hz
Minimum inlet pressure	1 bar
Direct current (DC)	no

PRODUCT INFORMATION

The electric valve RN155 Plus is specially developed to meet the demand of an electric valve in low pressure applications. The 1-piece, moulded coil design made it possible to meet the high IP68 insulation standards.

Differential pressure for opening and closing: at least 0.3 bar.

With flow control and manual operation.

Last modified date: 06/10/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>