

**Profec Slangtule zeskant  
messing 1/4" x 10 mm  
binnendraad x slangtule 30bar  
(0411904)**



# TECHNISCHE SPECIFICATIES

|                  |                         |
|------------------|-------------------------|
| Materiaal        | messing                 |
| Verbinding       | binnendraad x slangtule |
| Werkdruk         | 30 bar                  |
| Max. temp.       | 120 °C                  |
| Maat             | 1/4" x 10 mm            |
| Max. temperatuur | 120 °C                  |
| Sleutelmaat      | 16                      |

# AFMETINGEN


|       |         |
|-------|---------|
| Dq-2  | 8 mm    |
| F-1   | 8 mm    |
| L     | 30.5 mm |
| Lb    | 30,5 mm |
| Lq-2  | 14 mm   |
| Nq-2  | 3       |
| P-1   | 14 mm   |
| ØDi-1 | 1/4 "   |

ØDi-2

6 mm

ØDo-2

10 mm

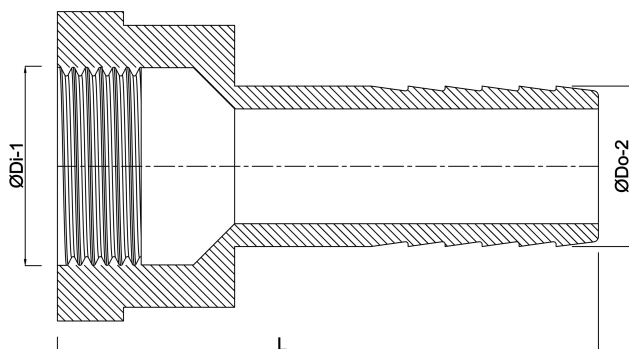

**Gegenereerd op datum: 23-05-2026**

<http://www.bosta.com>