

The image shows a large, blue, spherical Pentair Triton Neo pool filter. It has a black motor assembly on the right side and a pressure gauge on top. A label on the front provides technical specifications:

Filter	Size	Flow Rate (GPM)	Flow Rate (LPM)	Flow Rate (m³/h)	Flow Rate (m³/d)
100	400	5.0	19	0.45	10.8
150	600	7.5	29	0.68	16.2
200	800	10.0	38	0.91	21.6
250	1000	12.5	47	1.14	27.0

MAX 3.5 BAR

www.pentairpoolspa.com



TECHNISCHE SPECIFICATIES

Kleur	blauw
Materiaal	glasvezel versterkt polyester
Verbinding	binnendraad
Werkdruk	3,5 bar
Max. temp.	50 °C
Type	F-36S8-NEOCPPRO
Maat	2"
Diameter	914 mm
Gewicht	37.5 kg
Zand	420 kg
Filteropp.	0.64 m ²
Max capaciteit	32 m ³ /h
Max. vol. zwembad	160 m ³

AFMETINGEN


A	1160 mm
B	36 inch

B 610 mm

C 1253 mm

D 565 mm

E 338 mm

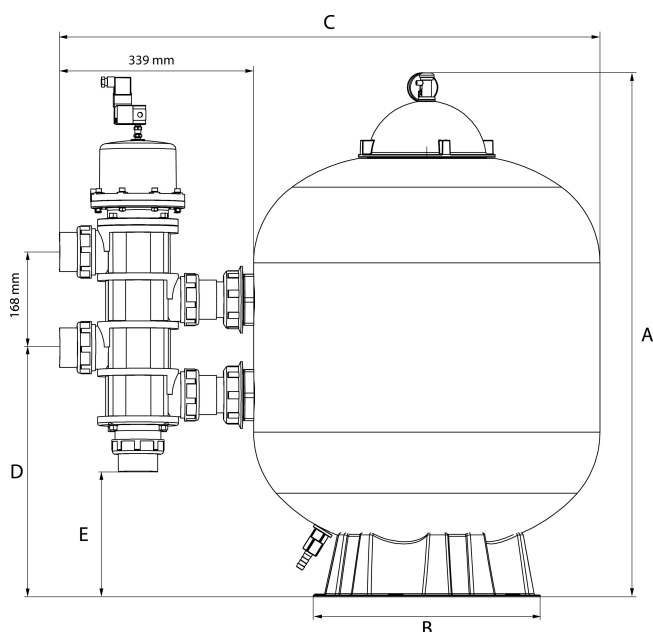

PRODUCTINFORMATIE

Glasvezel versterkte polyester tank uit één stuk vervaardigd met UV-bestendige coating
zandfilter met Pro Valve. De Pentair Pro Valve stelt externe regelsystemen zoals IntelliPool™ in
staat om automatische terugspoelingen van het filter uit te voeren. Garantietermijn: Tank 10
jaar

Gegenereerd op datum: 09-03-2026

<http://www.bosta.com>