

**DAB Pressure set KIWA
compliant PP 1" female thread
7,5bar 4,8A 230VAC green type
ESYBOX Mini 3 (7043397)**



TECHNICAL SPECIFICATIONS

Colour green

Material PP

Pump body PP

Material (spring) stainless steel 303

Material impeller 1 noryl

Connection female thread

Voltage 230VAC

Max. temperature 40 °C

Minimum medium temperature 0 °C
(continuous)

Maximum ambient temperature 50 °C

Pressure 7,5 bar

Type ESYBOX Mini 3

Tank 1 ltr

Size 1"

Power 0.85 kW

Impellers 3

MWC 55

Ampere 4,8 A

Max flow rate 4.8 m³/h

BEP Capacity 39.7



BEP Head 2.61

PORlh 52.8

PORhh 35.3

PORlq 1.827

PORhq 3.132

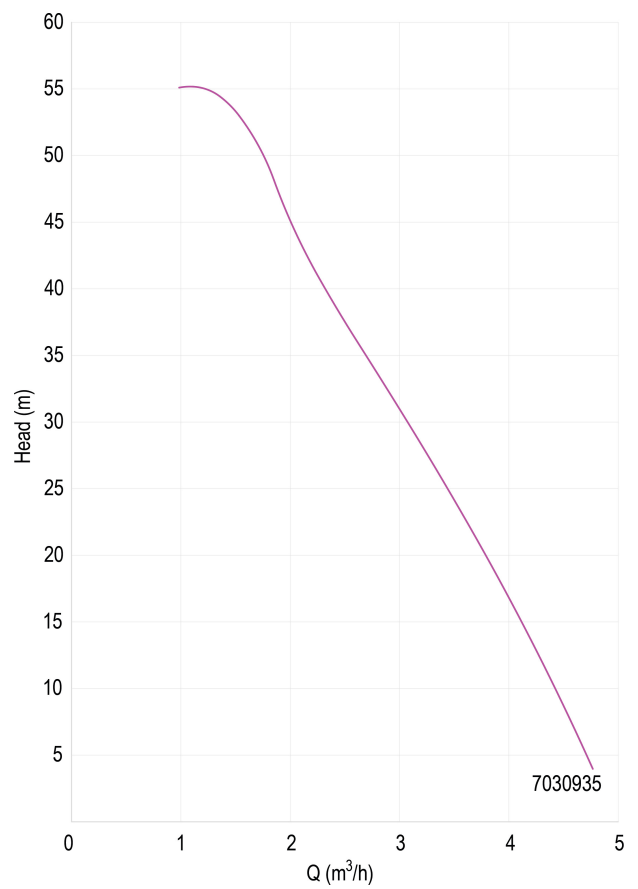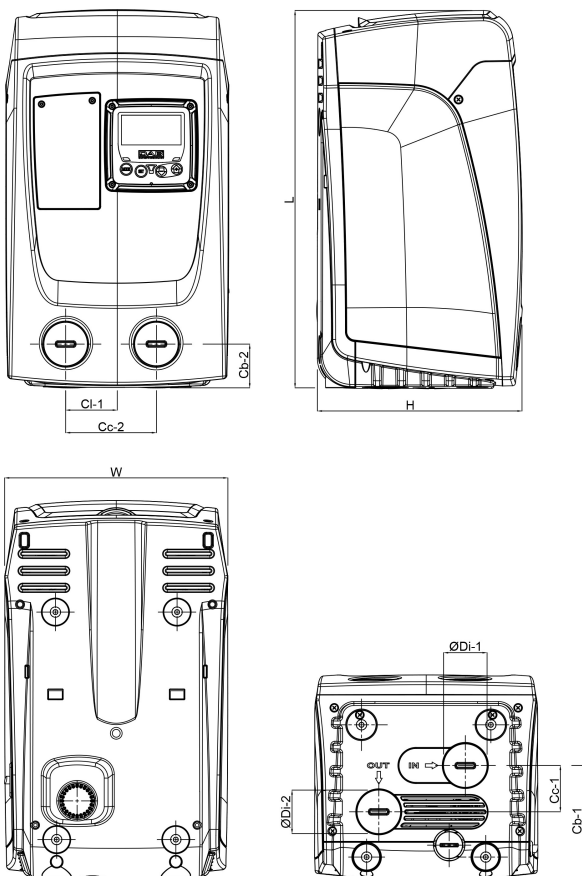

PRODUCT INFORMATION

This Esysbox Mini 3 pressure booster is specifically designed for use in drinking water installations and features a built-in safety device that automatically stops the pump when the pressure drops below 0.5 bar. Includes a self-priming multi-stage pump, management inverter electronics, pressure and flow sensors, adjustable high resolution LCD display with 1 litre built-in expansion vessel, and cartridge check valve. Suitable for use with potable water, in domestic systems and gardening applications. Pressure Set Point adjustable from 1 up to 5.5 bar. Max. Suction Depth: 8 metres. Installation: Horizontal or vertical fixed position

Last modified date: 14/03/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>