

**NaanDan Micro sprinkler  
plastic 3/8WW male thread 2,0  
mm 360° white type Hadar  
7110, inverted (0610026)**



**NaanDan**  
by Rivulis

# TECHNICAL SPECIFICATIONS

Type Hadar 7110, inverted

Material plastic

Connection male thread

Sector adj. range 360°

Rec. press. 1.5 - 3.0 bar

Colour white

Capacity 2 bar 199 l/h

Capacity 1bar 138 l/h

Capacity 1,5bar 171 l/h

Capacity 2,5bar 224 l/h


Capacity 3bar 248 l/h

Size 3/8WW

Nozzle size 2,0 mm

Radius 2bar 5,5 m

| 0610021 |    |     | 0610022 |     |      | 0610023 |     |      | 0610024 |     |      | 0610025 |     |      | 0610026 |     |      |
|---------|----|-----|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|
| 1.1mm   |    |     | 1.3mm   |     |      | 1.6mm   |     |      | 1.6mm   |     |      | 1.8mm   |     |      | 2.0mm   |     |      |
| Bar     | Lh | Ø   | Bar     | Lh  | Ø    | Bar     | Lh  | Ø    | Bar     | Lh  | Ø    | Bar     | Lh  | Ø    | Bar     | Lh  | Ø    |
| 10      | 43 | 2.8 | 10      | 60  | 8.5  | 10      | 70  | 8.8  | 10      | 88  | 9.5  | 10      | 116 | 9.5  | 10      | 138 | 9.6  |
| 15      | 53 | 8.0 | 15      | 74  | 9.0  | 15      | 89  | 9.4  | 15      | 110 | 10.0 | 15      | 140 | 10.0 | 15      | 171 | 10.5 |
| 20      | 61 | 8.5 | 20      | 87  | 9.4  | 20      | 103 | 9.8  | 20      | 128 | 10.0 | 20      | 160 | 10.0 | 20      | 199 | 11.0 |
| 25      | 67 | 9.0 | 25      | 97  | 9.8  | 25      | 115 | 10.2 | 25      | 144 | 10.7 | 25      | 184 | 10.7 | 25      | 234 | 11.2 |
| 30      | 73 | 9.8 | 30      | 107 | 10.0 | 30      | 124 | 10.2 | 30      | 159 | 11.0 | 30      | 197 | 11.0 | 30      | 248 | 11.3 |

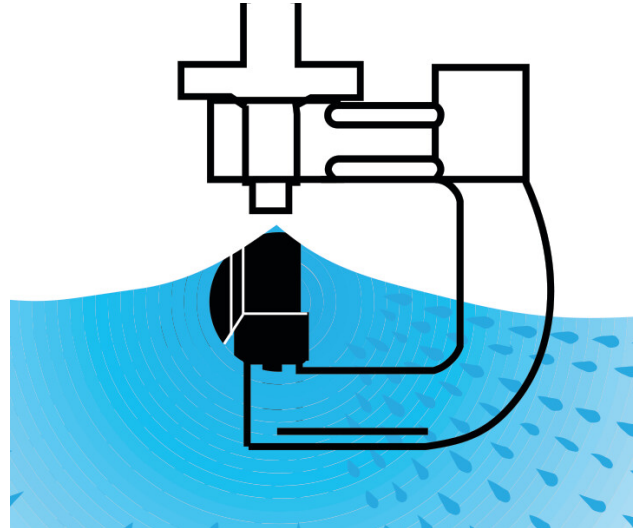

## PRODUCT INFORMATION

Complete with bayonet base. Mounted "upside down" on overhead spraylines to reduce wetting and dripping from spraylines. Use with 0620228 drainage preventor.

**Last modified date: 24/05/2026**

Bosta UK Ltd.  
 Reflection House  
 Olding Road  
 Bury St. Edmunds  
 Suffolk  
 IP33 3TA  
 T +44 (0) 1284 716580  
 E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>